


Electronic Calipers

- 6 in/ 150 mm
- 8 in/ 200 mm
- 12 in/ 300 mm

VALUELINE IP67

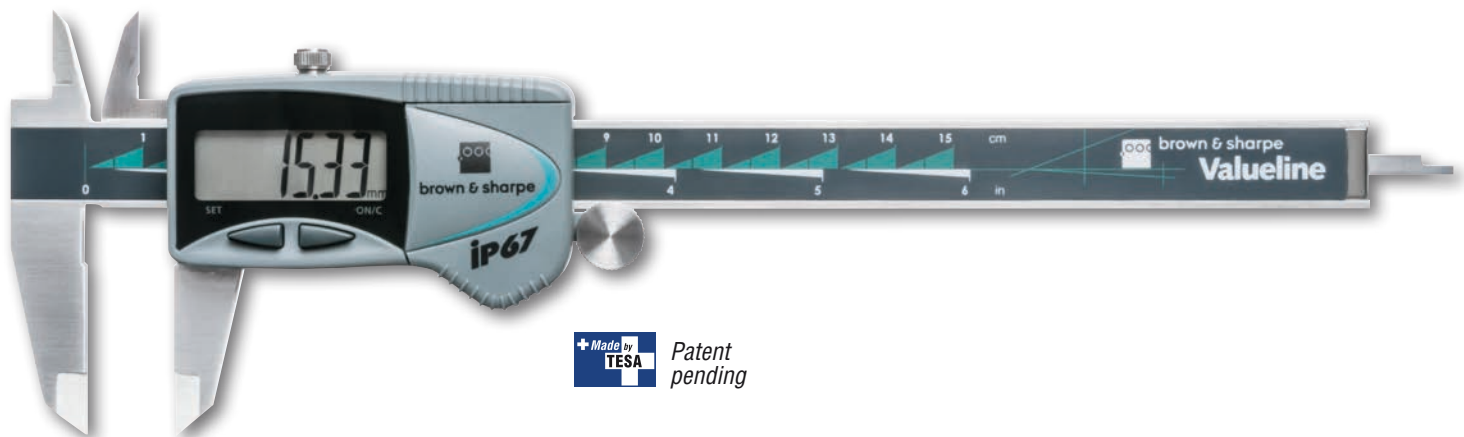

Patent
pending





UNIQUE FEATURES:

- IP67 TOTAL PROTECTION AGAINST DUST AND LIQUIDS
- UP TO 2 YEARS AUTONOMY
- ABS AND REL MEASURING MODE
- RECTANGULAR DEPTH ROD
- COMPLIANT WITH ISO 13385-1 STANDARD
- 150 MM TO 300 MM MODELS WITH THUMB WHEEL
- DESIGNED BY TESA

TECHNICAL SPECIFICATIONS

Order number	Measuring range	Depth Rod	Thumb wheel	Dimensions, mm	
				A	B
00599390	6 in/ 150 mm	■	✓	40	16
00599392	8 in/ 200 mm	■	✓	50	20
00599393	8 in/ 200 mm	■	✓	64	22

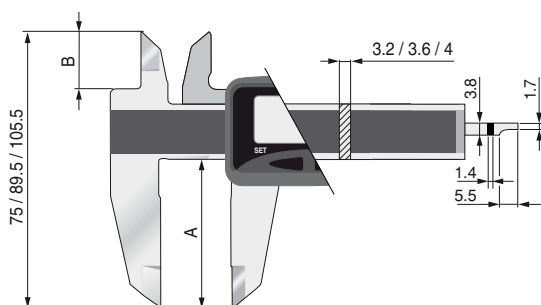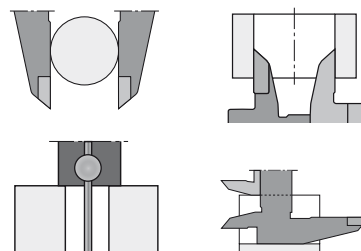

TECHNICAL DATA

Measuring span	6 in / 150 mm – 8 in / 200 mm – 12 in / 300 mm
Resolution	0,01 mm / .0005 in
Repeatability	0,01 mm
Max. permissible error	0,02 mm per 100 mm, 0,03 mm above. In case of inversion of measurement direction or the use of depth rod, these values are increased by 0,02 mm
Display	Large LCD display, 11 mm digit height
Degree of protection	IP67 (CEI/IEC 60529)
Maximal moving speed	2,5 m/s
Temperature limit for use and service	10°C to 40°C
Maximum working humidity	100%
Power supply	CR2032 3V
Autonomy	1,5 to 2 years
Material	Stainless steel
Weight	150 mm: 150 g – 200 mm: 200 g – 300 mm: 280 g
Norm	ISO 13385-1
Directive compliance	REACH, according to 1907/2006/CE EMC, according to 2004/108/CE DEEE, according to 2002/96/CE ROHS, according to 2002/95/CE



Wheel available for 150 mm, 200 mm and 300 mm models

WWW.TESAGROUP.COM