





positive profile

Profilitec S.p.A.
Via Brescia, 43
36040 Torri di Quartesolo
(Vicenza) ITALY
tel. +39 0444 268311
fax. +39 0444 268310
e-mail
profilitec@profilitec.com

english service
+39 0444 268331
service français
+39 0444 268333
servicio español
+39 0444 268332
Kundendienst
+39 0444 268332
e-mail
export@profilitec.com

www.profilitec.com

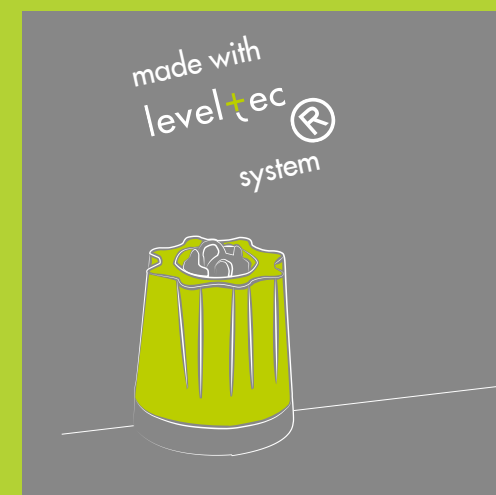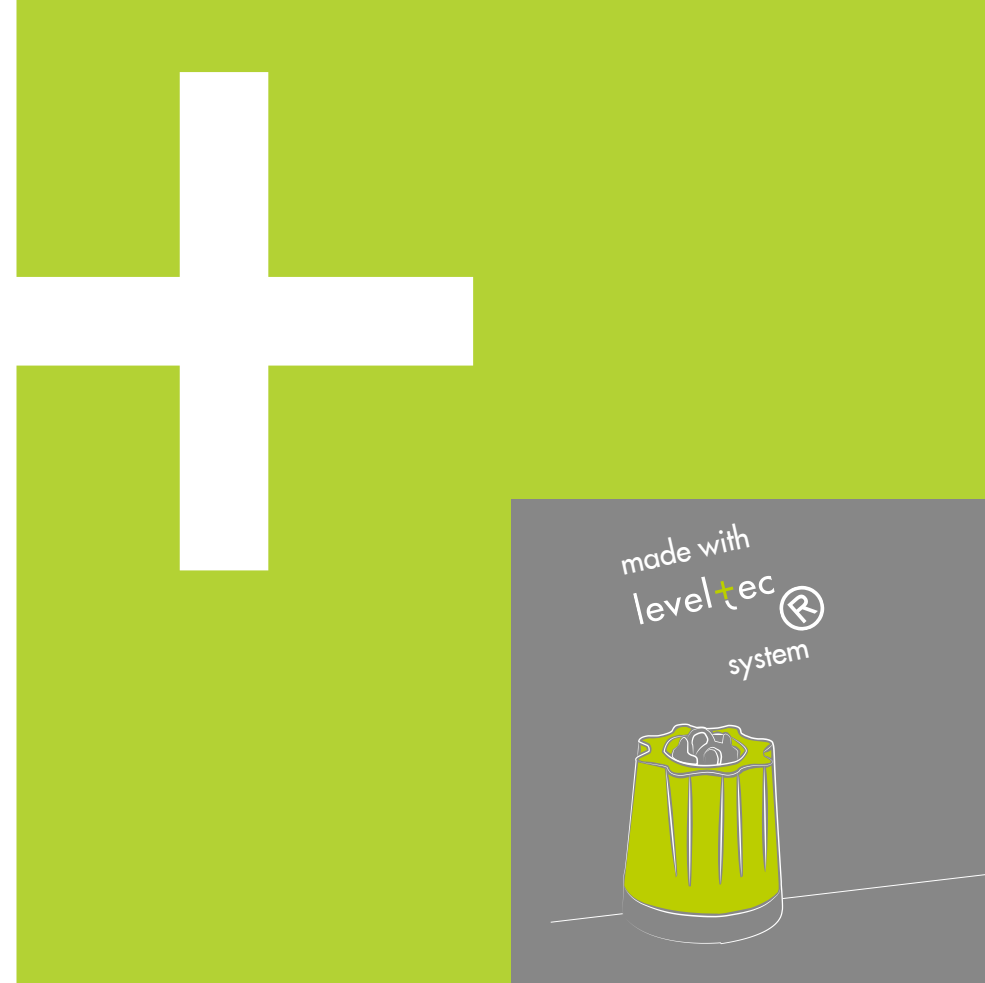





 **profilitec**
positive profile



leveltec

click

profiltec
perimetria perimetria



LEVELTEC LINEAR TIE-BASE



1 mm- 3/64"




2 mm- 5/64"



3 mm- 1/8"



5 mm- 13/64"

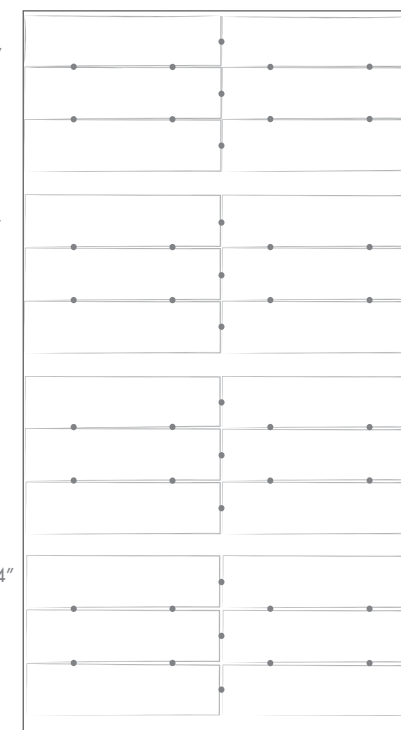

Tirante lineare, brevettato per la posa di pavimenti in pietra e ceramica.


Linear tie-base, patented for stone and tile floors.

Niveleur linéaire, brevetée pour la pose de sols en pierre et carrelage.

Patentiertes Linearspananker für die Verlegung von Bodenbeläge aus Stein und Keramik.



++
1, 2, 3, 5 mm

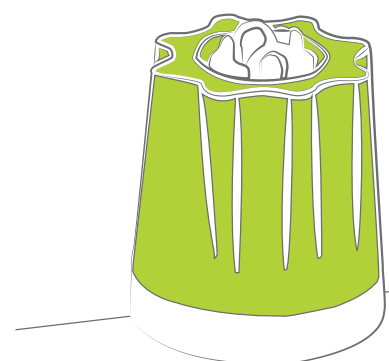

Sistema unico brevettato CLICK & LEVEL. Spessore piastrella (3 ÷ 20 mm), fuga 2,3,5 mm e (3 ÷ 12,5 mm) fuga da 1 mm.

Patented system CLICK & LEVEL. Tile thickness (3 ÷ 20 mm), joint 2,3,5 mm (3 ÷ 12,5 mm), joint 1 mm.

Un système unique, breveté CLICK & LEVEL. épaisseur du carreau (3 ÷ 12,5 mm) joint 2,3,5 mm et (3 ÷ 12,5 mm) joint 1 mm.


Einzigartiges patentiertes Verlegesystem CLICK & LEVEL. Fliesendicke (3 : 20 mm), Nennbreite der Fuge 2,3,5 mm (3 : 12,5mm) und 1 mm.



LEVELTEC CROSS TIE-BASE



1 mm- 3/64"




2 mm- 5/64"



3 mm- 1/8"



5 mm- 13/64"

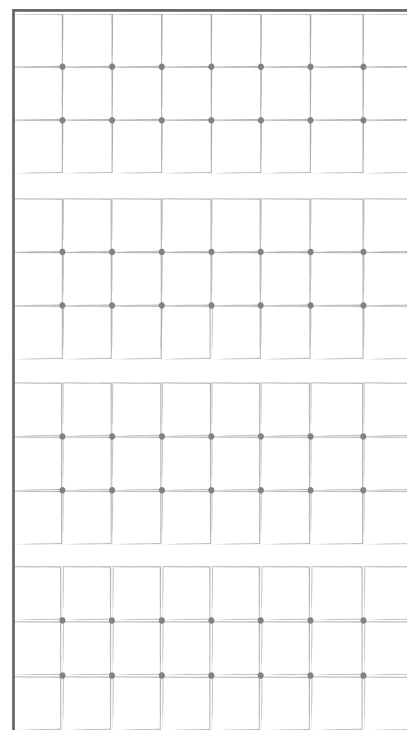


Tirante a croce, brevettato. La crocetta viene asportata completamente dopo il livellamento.

Cross tie-base, patented. The tie-base is completely removed after leveling.

Cross niveleur, breveté. La tige du niveleur est complètement détachée de la base après le nivellement.

Patentiertes Kreuzspananker. Das Gewinde wird komplett nach der Nivellierung entfernt.




++
1, 2, 3, 5 mm

LEVELTEC "T" TIE-BASE



1 mm- 3/64"




2 mm- 5/64"



3 mm- 1/8"



5 mm- 13/64"

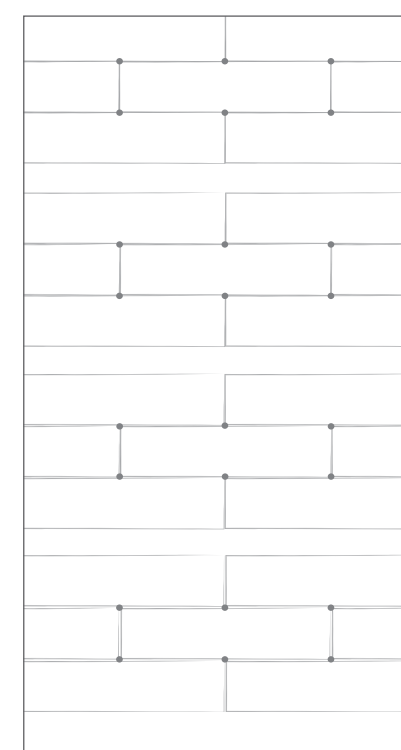

Tirante a T, brevettato per pose a "correre".

T-tie-base, patented for Straight Course lying.

T niveleur, breveté pour pose droite.

Patentiertes T-Spananker für die Verlegung in Bahnen.



++
1, 2, 3, 5 mm