

PRODUCT LINEUP CATALOG



Behind Experience & Success...





Providing Innovative Solutions

Supply

Olefins Trade Corporation is one of the most significant multipurpose equipment and product suppliers in Bangladesh. We believe in strong and solid relationships. We do supply multipurpose equipment, products and product solutions for business or corporation to meet our customer's expectations. We are able to supply a wide range of product's according to client demand.

Installation

Whether you are planning or already have equipment's that are needed installation process, Olefins Trade Corporation is there for you to provide installation services. Our experts in every specific field are ready to help you with your equipment and the installation process. Our expert and certified engineer are always ready to provide the services e.g installation, replacing old equipment, upgrading your system to improve or enhance the performance with minimal cost and time-frame to keep your process smooth and trouble free.

Servicing

We are also involved in keeping your equipment's in production and in safe operating condition. Therefore, we also provide repair and maintenance services to our clients by our trained personnel to keep your equipment running. If you need routine service and maintenance for keeping equipment safe and running at highest performance, we are perfect for that. It will help you to avoid downtime. So it is easy to save valuable resources.

Consultancy

Olefins Trade Corporation knows that without proper consultation, it is not possible to embark a new project or make a decision to buy new equipment or to set them up. It is to grow your system, grow your business and every on-going task. For long run you have no alternative without a proper plan and guideline that works just like a navigator for your business. We understand your necessity for ensuring that your equipment need to meet all the requirements.




Index



Plena Easy Line	1	High Power Speaker	14
Plena Mixer Amplifier	1	Column Speaker	15
Plena Power Amplifier	1	Horn & Interior Design Speaker	15
Plena All in One	2	Hand-Held Microphone	16
BGM System	2	Clipped-on Microphone	16
Plena Call Station	3	Wireless Microphone	16
Voice Alarm Controller & Router	3	Conference System	17
Call Station & Keypad	3	Remote Delegate	18
Time & Message Manager	4	Megaphone	18
Wireless Microphone	4	Driver Unit	18
Wired Microphone	4	Smart Access Technology	19
Ceiling Speakers	5	Turnstile Gate	21
Cabinet Loudspeakers	6	Car Parking Barrier	22
Fire Dome	7	Retractable Gate	22
Horn Speakers	7	Electric Gate	22
Volume Controller	7	Metal Detector	23
DSP Matrix Mixer	8	Electronic Article Surveillance	23
DSP Amplifier	8	Archway	24
Matrix Call Station	8	X-ray Baggage Scanner 24	24
Matrix Wall Control Panel	8	Walkie Talkie	25
Praesideo System	9	IP Telephone	26
System Overview	9	Spill Solution	27
Digital Discussion System	10	Safety Cabinet	28
Wireless Conference System	11	Harnesses	29
TOA Amplifier	12	Lanyards	30
Portable Wireless Amplifier	13	Eye Wear	31
TOA Ceiling Speaker	14	Eyewash	32
PA Box Speaker	14	Safety Showers	34

Plena Easy Line

- High quality
- Ideal for small to midsize applications
- Easy expandability
- Easy to install and maintain

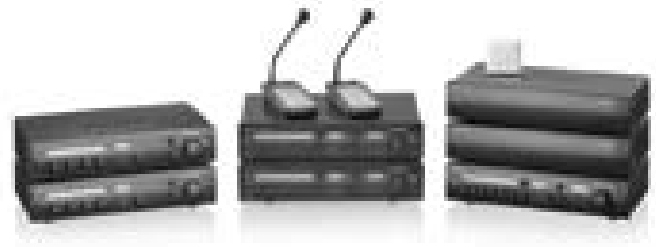

Plena Mixer Amplifier



- 6/4 microphone/line inputs, plus 3 music source inputs
- Wide range of power (30, 60 and 120 Watts)
- 100 V, telephone and a call station input with priority & VOX
- 2 zones and 2-channel operation
- Voice-activated emergency override
- 2-tone chime built in, 7 more chimes optional with call station
- Outputs for line out, music-only out, and insert point
- 24 V backup input with built in 24 V charger
- Separate tone controls for microphones and music sources

PLE-10M2-EU

PLE-1MA060-EU

PLE-2MA120-EU

PLE-1MA030-EU

PLE-1MA120-EU

PLE-2MA240-EU

Plena Power Amplifier

- 120 and 240 W power amplifier in a compact housing
- 1 V line level balanced input
- 70 V, 100 V and 8 ohm outputs
- 100 V input for slave operation on 100 V speaker line
- 24 VDC backup power with built in charger
- Temperature-controlled forced front to back ventilation (directly stackable)



PLE-1P120-EU

PLE-1P240-EU

Plena Power Amplifier

- Wide range of power amplifier from 120W, 240W and 480W
- Multiple outputs - 70 V / 100 V and 8/4 ohm
- Temperature controlled forced front to back ventilation, directly stackable
- Mains, battery back-up, and pilot tone supervision
- Dual inputs with priority switching (LBD1938)



LBD1930/00

LBD1935/00

LBD1938/00

Plena Mixer Amplifier

- 4 microphone / line inputs, plus music source input
- Announcement only output, 3-wire volume override
- Wide range of output power (60, 120 and 240 Watts)
- 2-tone chime



PLE-1ME060-IN

PLE-1ME120-IN

PLE-1ME240-IN

Plena All in One



PLN-1AIO90-IN

PLN-2AIO180-IN

- 1 & 2 Zone Output
- All-in-one solution for background music and paging
- DVD/CD-player for video and audio
- Supports MP3, JPEG, and multi-format video
- outputs
- FM/AM tuner with 10 presets and digital control
- Dual-zone 120 W mixer amplifier with volume
- control per zone

Plena Pre-Amplifier

- Six-zone system pre-amplifier, with single or dual channel operation
- Two input channels for call stations
- Universal input for microphone/line, with speech optimized tone control
- Three inputs for BGM selection and music optimized tone control
- Front panel zone selection for BGM and call station
- zone selection for calls



LBB-1925/10

Plena BGM System



PLE-SDT

- MP3 playback from SD card and USB inputs
- FM tuner with RDS, presets and digital control
- Simultaneous operation of SD/USB-player and FM tuner
- Separate outputs for digital source and FM tuner

Plena Call Station

- PTT-key for calls for activation
- Momentary or toggle
- Green LED, indicating microphone active
- Stable metal base design with fixed 2 m cable and lockable
- Euro style connector
- Phantom powered by amplifier



Voice Alarm Controller & Router



- Heart of the Plena Voice Alarm System
- EN 54-16 certified and EN 60849 compliant
- Message manager and 240 W amplifier build-in
- Six-zone outputs
- 6 emergency and 6 business triggers

- Expand the Plena Voice Alarm System with six zones
- 12 additional input contacts
- Six volume override output contacts
- Supervision within the Plena Voice Alarm System
- EN 54-16 certified

Call Station & Keypad



- Stylish six-zone call station for the Plena Voice Alarm System
- Six zone selection keys, all-call key and momentary
- PTT-key for calls
- Selectable gain, speech filter, limiter, and output level for improved intelligibility
- LED indications for zone selection, fault, and emergency state
- Call station extension provides seven additional zone and zone group keys



- Seven zone selection keys
- LED indications for zone selection
- Up to eight keypads can be connected together

Plena Timer & Message Manager



PLN-6TMW

- 14 Chimes
- BGM level control
- Six contact outputs
- Two weekly programs
- Automatic daylight/standard time



LBB 1965/00

- Highly flexible stand-alone digital message player
- Up to 12 messages and 12 trigger inputs
- Downloads messages from a PC in WAV format
- Compliant with standards for emergency sound systems
- Zone control for Plena system preamplifier

Wireless Microphone



MW1-RX-Fx

- 193 automatically selectable UHF channels
- PLL synthesized technology
- Pilot tone & noise squelch
- True diversity for stable reception
- Table top and 19" rack mountable



MW1-HTX-Fx



MW1-LTX-F5

- 193 selectable UHF channels
- PLL synthesized technology
- LCD with battery status and frequency indication
- Lock function
- Approximately 15 hours operation on alkaline batteries

Wired Microphone



LBB 9080/30

- Excellent speech reproduction
- Rugged construction
- Easy to handle
- Remote switching contact
- Close talking applications
- Matt black finish



LBC 2900/xx


- Unidirectional dynamic microphone
- Handheld or stand-mounted use with clip (supplied)
- Rugged construction
- Modern non-reflective dark grey finish



LBB 9600/20

- Condenser transducer
- Unidirectional
- High speech intelligibility
- Low sensitivity to case noise and vibrations
- Phantom powered
- Rugged construction
- Modern non-reflecting matt black finish

Ceiling Speakers

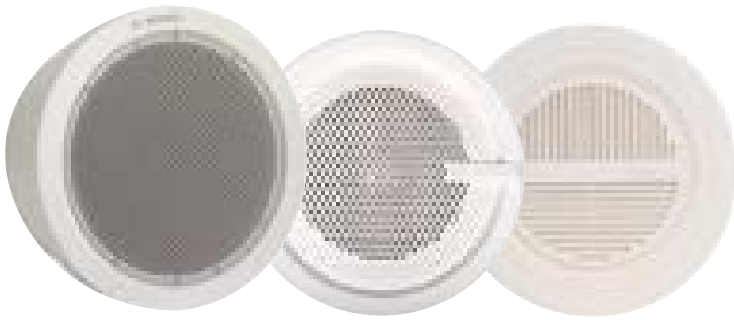

LB1-UM06E-1

LBD 8351/10

LBC 3090/01

- Robust metal enclosure
- Surface and/or recessed mounting
- Loudspeaker supervision boards
- Suitable for speech and music reproduction
- Provision for internal mounting of the optional line
- Recommended for voice evacuation systems



LBC 3951/11

- Installation friendly
- Splash - waterproof
- Compact yet powerful
- Comply with international
- Very wide opening angle
- Modern unobtrusive styling
- Installation and safety regulations



LBC 3090/31

- Ball-proof
- Easy to install
- Increased sensitivity
- Simple power setting
- Protective dust cover
- Flush-mounting in ceiling cavity
- Optional certified fire dome
- Unobtrusive in virtually all interiors
- Suitable for speech and music reproduction
- Complies with international installation and safety regulations



LC3-UC06

LC3-UC06-LZ

- Easy to install
- Optional back-box
- Unobtrusive design
- Light weight ABS material
- Suitable for speech and music reproduction




LBD0606/10

LCZ-UM12-IN

LCZ-UM24-IN

- Easy to install.
- Simple power setting.
- Flush-mounting in ceiling cavity.
- Unobtrusive in virtually all interiors.
- Suitable for speech and music reproduction.

Cabinet Loudspeakers

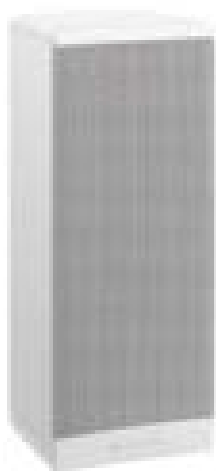

LB1-UM20E (D/L)
LB1-UM50E (D/L)

- Loudspeaker supervision board
- Self-restoring overload protection
- High-fidelity music and speech reproduction
- Supplied with adjustable wall-mounting bracket
- Provision for internal mounting of the optional line



LB2-UC15-(D1/L1)
LB2-UC30-(D1/L1)

- High-fidelity music and speech reproduction
- Selectable 8 ohm, 70 V and 100 V inputs
- Compact yet robust ABS enclosure
- Supplied with adjustable mounting bracket
- Complies with international installation and safety regulations



LBC-3018/01

- Suitable for speech and music reproduction
- Robust metal enclosure
- Surface and/or recessed mounting
- Provision for internal mounting of the optional line/
- Loudspeaker supervision boards



LA1-UW24-D1
LA1-UW24-L1

- Good speech intelligibility and background music reproduction
- For applications where directivity is important
- High sensitivity & MDF construction
- Swivel wall-mounting bracket supplied as standard
- Complies with international installation and safety regulations

Fire Dome

- Suitable for speech and music reproduction
- Simple power setting
- 5 m fixed connection cable
- Splash-waterproof type
- Robust self-extinguishing ABS enclosure to UL 94 V0



LBC 3095/15

Horn Speakers



LBC 3481/12-15W

LBC 3491/12-15W

LBC 3492/12-30W

LBC 3493/12-45W

- High efficiency drivers
- Up to 45 W (max. power)
- Wide opening angle
- Excellent speech reproduction
- Simple power setting
- Water- and dust protected to IP 65
- Versatile mounting bracket
- Comply with international installation and safety regulations

Volume Controller

LBC 1420/10



LBC 1410/10




LBC 1400/10



- 12 W, 36 W and 100 W versions
- Available in power-save or failsafe versions
- Built-in 24 VDC override relay
- Continuous rotating system
- Suitable for 3-wire and 4-wire systems

Typical Connection Layout

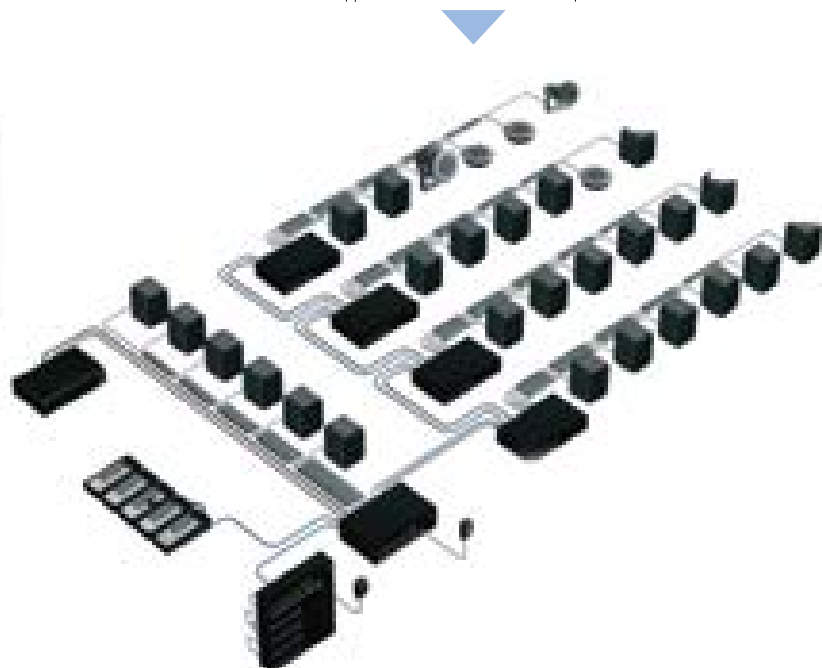

DSP Matrix Mixer



PLM-8M8

- Complete DSP zone matrix mixer and loudspeaker processor
- 4 microphone/line, 3 music source, call station and emergency inputs
- 8 independent output zones, and "Amp Link" outputs
- Ethernet control and Windows PC GUI, and an iOS app for zone control via iPhone and iPad
- RS485 connection for call stations and wall control panels

DSP Amplifier

- 4 channel, Class D power amplifier
- 100V/70V/8 Ω /4 Ω outputs
- Complete loudspeaker processing DSP with input mixing; controlled by PC GUI and iOS app
- Amp Link to connect easily with PLM-8M8
- Environmentally friendly auto standby mode



PLM-4Px2x

Matrix Call Station



PLM-8CS

- Capacitive touch
- Programmable zone selection
- Modern aesthetic design
- Powered from PLM 8M8
- Loop through to connect with either more Call Stations or Wall Control Panels

Matrix Wall Control Panel

- Capacitive touch
- Source selection
- Volume control
- Powered from PLM 8M8
- Loop through to connect with either more Wall Control Panels or Call Stations

PLM-WCP



Praesideo



7. Fireman's Panel
6. Administration Floor
5. Packaging Floor
4. Finishing Floor
3. Sewing Floor
2. Cutting Floor
1. Ware House

Call Station



- Fully digital
- High quality products
- Fully supervised redundant system
- Easy installation and maintenance

System Overview



CCS 1000 D Series



- Built in Digital Acoustic Feedback Suppression (DAFS) for ensuring superior speech intelligibility
- Plug-and-play functionality for quick and easy connection of up to 80 Discussion Devices
- Intuitive web browser interface control for advanced configuration and control
- Built in MP3 recorder with internal memory and USB recording
- On-board support for automatic HD camera control



CCSD-Delegate Unit

CCSD-Chairman Unit

Control Unit
CCSD-CURD

DCN Wireless Conference System



BOSCH
Invented for life

DCN Multimedia Series



A-2000 Series

Packaged Amplifiers-2000 Series

- 3 Electronically Balanced microphone input,
- Better acoustics can be achieved with bass 2 AUX inputs and recording output.
- Phantom power provided to MIC1.Both AC and DC operation possible and treble tone control.
- Muting function enables MIC1 to have priority




A-2030	30W	A-2120	120W
A-2060	60W	A-2240	240W

A-1000 Series

AS Series Mixer Power Amplifier

- 3 Mic inputs, 2 Aux inputs, 1 pre-output
- Speaker output of high impedance (100V line) and low impedance (4-16 Ω)
- Muting function enables MIC 1 to have priority
- Bass and treble control
- 5-Zone speaker selector and 1 all call (A-1240SS AS/ A-1360SS AS Only)

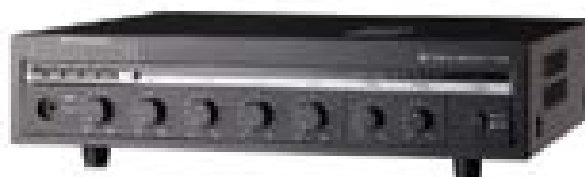

A-1240SS AS	240W
A-1360SS AS	360W

A-1700 Series

- Phantom Power to all connected microphones
- Easy tonal adjustment of all output signals with bass and treble controls
- Record output for connecting an external recorder to archive or back up broadcasts.
- Line output to connect a signal processor such as equalizer



A-1706	60W
A-1712	120W
A-1724	240W

A-200 Series

A-230 HV Mixer Power Amplifier

- Compact and lightweight.
- Suitable for paging and background music application.
- MIC1 auto-muting facilitates announcements at any time.
- High performance with wide frequency response, and low noise and distortion.



A-230	30W
-------	-----

Portable Wireless Amplifiers

Medium Range

- Compact and lightweight yet tough and portable.
- Max. power 25W through built-in 2 way speaker.
- Input volume and tone control for microphone input/AUX input.
- Continuous operation for approx. 24 hours (using alkaline batteries, non-cassette mode)
- Cassette deck (WA-1822C) features 2-track/1 channel monaural operation with adjustable recording/playback volume adjustment, tape speed control and auto-reverse.
- Built-in storage for wireless/wired microphones on the back.

WA-1822C	25W
WA-1822	25W



High Range



WA-Z100SD AS 100W

- Plays CD, USB, SD/MMC card.
- Operating time of 3-9 hours .
- Max. power 100W with 1" tweeter and handle and wheels.
- Portable with a one-touch retractable
- Option to install up to 2 sets of UHF wireless set Storage for wireless microphone Bass and treble control.

Economic Range

BOWAY®

- Quality and smooth sound.
- 80 Meter Cover
- Built in Rechargeable battery.
- RMS power 40 watt, AC 220V/50Hz
- 8 Hours Battery Backup & UHF 700-800MHz.
- Dual channel for Wireless Microphone.
- FM/USB/ SD/MMC Rec Player.
- Digital Display for monitoring & Easy removed anywhere.
- One-touch retractable handle, storage box for 2pcs microphones, optional remote control, slots for up to 2 pcs wireless receiver module




BW 370

Ceiling Speakers

- Surface-Mounting Type
- Surface-Mounting 12cm dynamic cone speaker
- Easily installed speaker with spring-catch mount
- Push-in connector for quick wire hook-up
- Bridging terminals for bridging of speaker lines
- ABS resin baffle



PC-2668 6W

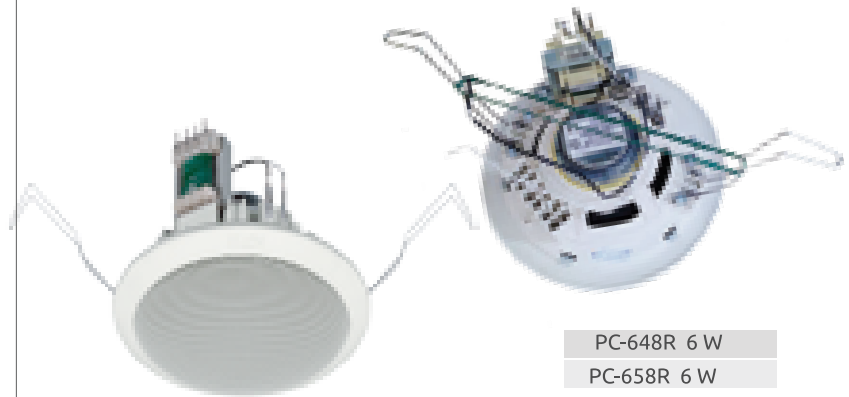

PC-648R 6 W

PC-658R 6 W

- Spring Clamp Type
- Spring Clamp mechanism for easy speaker
- Mounting to the ceiling
- 12cm (5") cone type (PC-648R)
- 16cm (6") cone type (PC-658R)
- PP Resin, SECC Punching Net

PA Box Speakers

BS-634/ BS-634T / BS-1034/ BS- 1034S 6W



- Push-in terminal block
- Installed horizontally/ vertically

BS-678/ BS-678T / BS-678B/ BS- 678BS 6W



- Easy & quick installation
- Ideally suited for BGM and announcements

High Power Speaker

BS-1030B/1030W 30W



- High Power PA Box Speakers
- Speaker's smoothly curved exterior design blends in well with modern buildings
- Either mounted directly to walls or to both walls and ceilings using the supplied bracket or a wide range of optional brackets
- Weather-Resistant Construction (IP-X4)
- Two different color variation, black or white

Column Speakers

- Enhance directivity of Sound waves
- Allows clear, good-quality sound amplification with minimal reverberation and feedback
- Highly effective in reducing howling and echo
- Mounting brackets included
- Compliance with IP-65

TZ-206B/TZ-206W 20W



TZ-406B/TZ-406W 40W



TZ-606B/TZ-606W 60W



Horn & Interior Design Speakers



SC-630M 30W




CS-64 6W



CS-154 15W

CS-304 30W

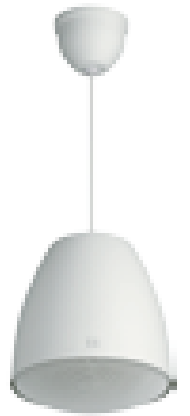

PE-64 6W

PE-304 30W

- Re-paintable
- Compliance with IP-65
- Input impedance easily changeable
- Shock-resistant aluminum oval horn
- Stainless steel brackets and powder-coated horn.
- Flexible speaker direction adjustment with accessory brackets.
- Available in high-impedance models and low-impedance models
- Unobtrusive off-white color helps speakers blend in with surroundings




PJ-64 6W

PJ-304 30W



PJ-100W 10W

PJ-200W 20W

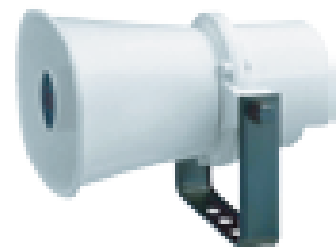

SC-615M 15W

Hand-Held Microphones



- Hand-held and stand mounting use
- Short-off type slide on/off
- Rigidly constructed of die cast aluminum
- Special coating on microphone body

Clipped-on Microphones



EM-410

- Ideal for voice-oriented application
- Designed for best performance
- Capsule rotates 360 degrees.
- High sensitivity makes it
- Suitable for speech app.
- Employs resolvable clip.



EM-360 AS

Wireless Microphones

- UHF Brand Wireless Microphone Systems
- 16 Channels & 64 selectable frequencies
- Special for Speech & Vocal



WT-5810+WM 5225



WT-5810+WM 5325+YP M5300



WT-5800+WM 5325+WM 5225+WH 4000H

TS-680 Series



TS-680 AS

- Central Amplifier Unit
- Maximum 24 units can
- 2 additional central units
- Expandable to maximum 72 units by connecting



Chairman Unit
TS-681 AS



Delegate Unit
TS-682 AS

- Removable gooseneck microphone and built-in speaker.
- Integrated Control Output.

TS-770 Series



Chairman Unit
TS-771



Delegate Unit
TS-772



Central Amplifier Unit.
TS-770


- Maximum 70 units can be used per system.
- Expandable to maximum 210 units by connecting 2 additional central units.

TS-780 Series

Central Amplifier Unit
TS-780



- Maximum 64 units can be used per system
- Expandable to maximum 192 units by
- Conference System connecting 3 additional central units
- Conferences can be recorded onto SD card or external recording device

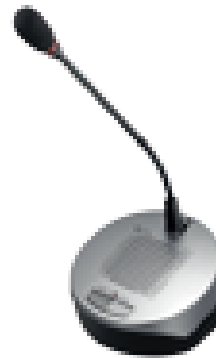

Chairman Unit
TS-781



Delegate Unit
TS-782

- Removable gooseneck microphone and built-in speaker
- Integrated Control Output

Remote Delegate



TS-775

Remote conferencing is possible, enabling people at a remote location to participate in the conference.



YR-770-10M



YR-770-2M

Extension Cable 10M & 2M

Megaphones



ER-3215 15W

- With shoulder strap
- Detachable handgrip type microphone



ER-520S/ ER-520W 10W

- Small in Size and light in weight
- Handle and microphone with anti-bacteria
- Treatment improve hygiene and safety during use.

Driver Units



TU-632 AS / TU-652 AS
30W 50W



TU-632M AS / TU-652M AS
30W 50W



TH-652 AS



TC-631/ TC-631M (30W)


- Compliance with IP-65.
- Unobtrusive two-tone colors.
- Two rated input 30W and 50W.
- (TU-632M AS / TU-652M AS) available .
- Ideal for broadcasting , mosque, car parks.
- External stainless steel hardware and powder -coated horn.
- Both low-impedance models (TU-632 AS/ TU-652 AS) and high impedance models

Smart Access Technology



AC-F100

- User Capacity 1000 user
- Log Capacity 1,00,000 log
- Card + Finger + 1.3 M.P Camera.
- Dia Cust Aluminum



AC-2100

- User Capacity 1500 finger
- Log Capacity 5,000 log
- Card + Finger
- IPX3 Weatherproof Certified.



AC-5000

- User Capacity 20,000 finger
- Log Capacity 61,000 log
- Card + Finger
- 2.8" Color TFT LCD.



AC-6000

- User Capacity 1,00,000 finger
- Log Capacity 5,00,000 log
- Card + Finger + 1.3 M.P Camera.
- 4.8" Color TFT Touch Screen.



- User Capacity 22,000 finger
- Log Capacity 55,000 log
- Card + Finger+ Password

Anti-pass Back

SR-100FP



AC-4000

- User Capacity 22,000 finger
- Log Capacity 55,000 log
- Card + Finger+ Password



FOH02

Card + Finger Reader

Smart Access Technology



ZKTECO-iClock-680

- User Capacity 8,000 user
- Log Capacity 2,00,000 log
- Card + Finger + Password



ZKTECO-F18

- User Capacity 500 user
- Log Capacity 500 log
- Card + Finger + Password



Anviz-OA-1000

- Finger Capacity 5,000 user
- Log Capacity 1,00,000 log
- Card + Finger + Password



iFace 302

- Face Capacity 700 user
- Finger Capacity 1,500
- Card Capacity 10,000
- Log Capacity 1,00,000
- Face + Finger + Card



ANVIZ VF30

- Finger Capacity 2,000 user
- Log Capacity 50,000 log
- Card + Finger



Anviz-T5-Pro

- Finger Capacity 1,000 user
- Log Capacity 50,000 log
- Card + Finger



ZKTECO-F18


- User Capacity 1500 user
- Log Capacity 30,000 log
- Card + Finger + Password



Anviz-T60

- Finger Capacity 2,000 user
- Log Capacity 50,000 log
- Card + Finger + Password

Turnstile Gate

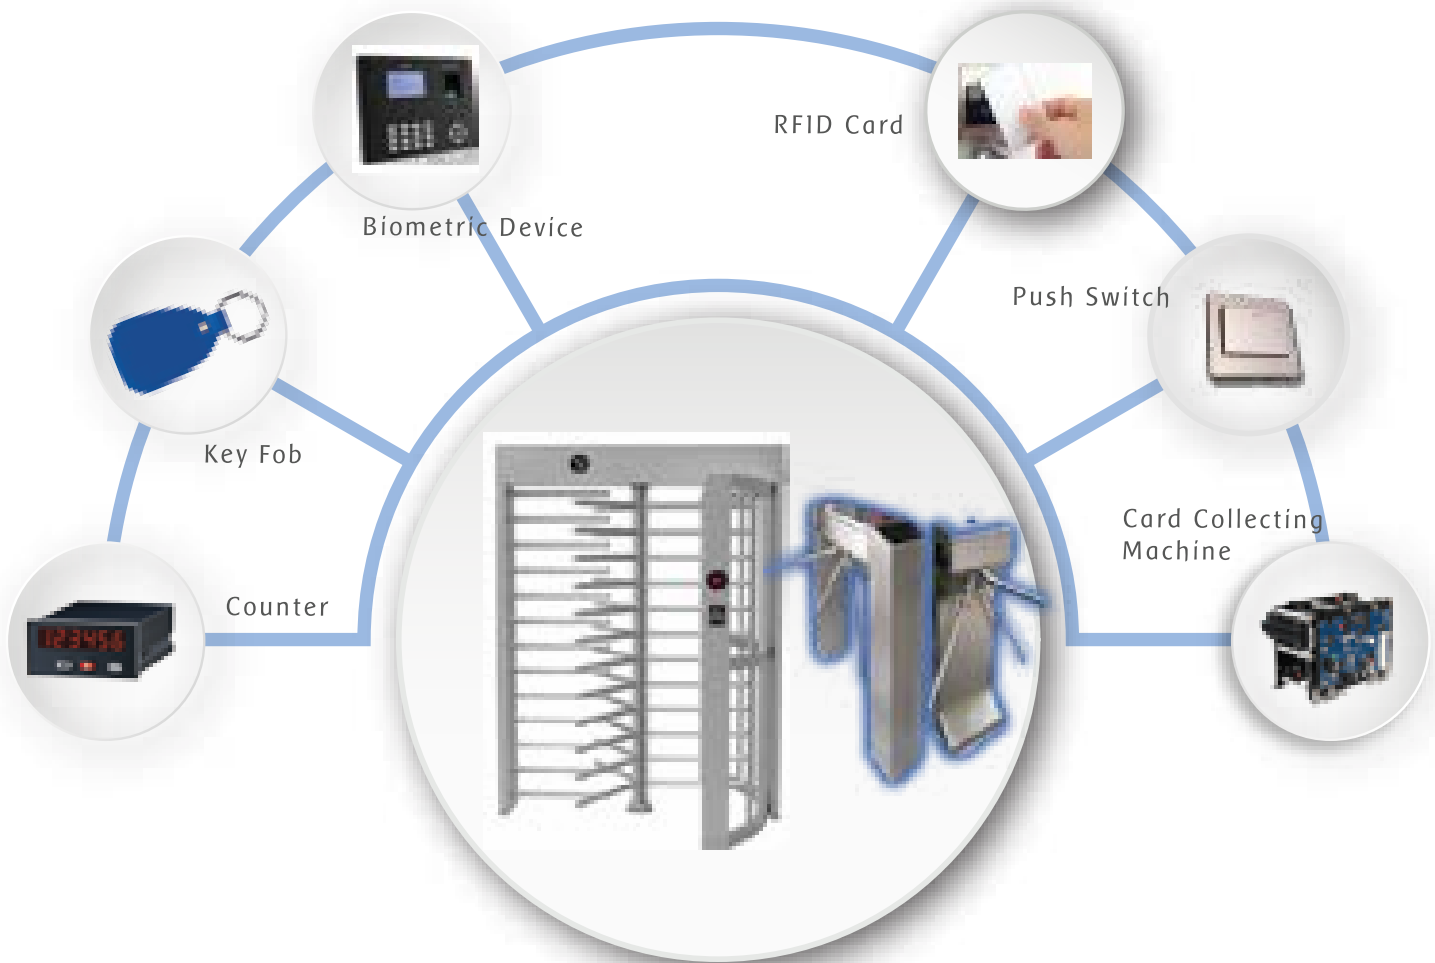


- Tripod Turnstile Gate
- Flap Barrier Auto Turnstile
- Parking Barrier
- Swing Barrier
- Access Control Gate
- Industrial Gate
- Vehicle Access Control
- RFID Access Control System



- Full Height Automatic Turnstile
- RFID Access Control System
- Security Revolving Doors
- Retractable Gates




Car Parking Barrier

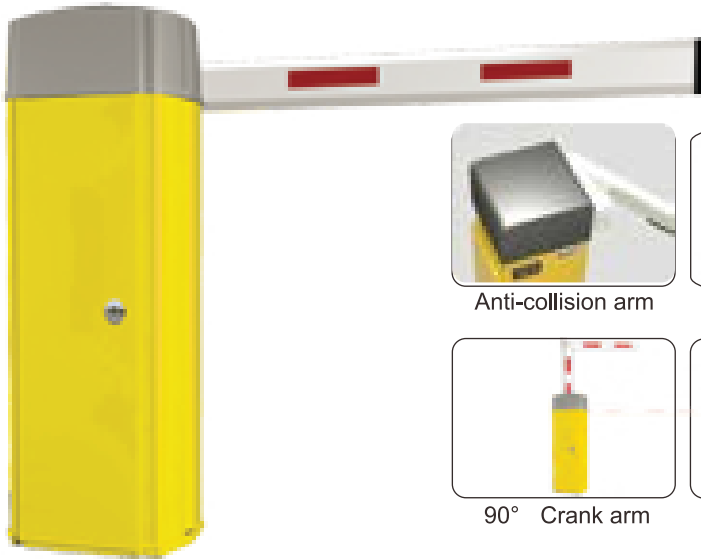


PAB-E2-NSN




Anti-collision arm

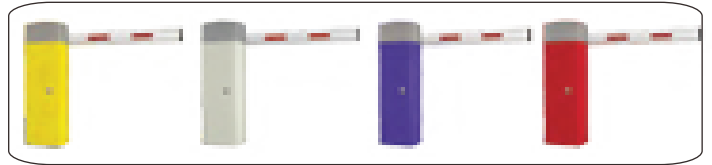


Color optional




90° Crank arm



180° Crank arm



Single fence arm



Double fence arm

- Normal-speed of open / close: 4/6 sec. optional
- Straight arm, Max-length following: . 6m for 6 sec . 4.5m for 4 sec
- Inclusive of remoter transmitter 2 and boom bracket 1
- Exclusive of anti-collision mechanism: need to buy additionally
- Housing color optional: yellow (default) /light yellow / white / red / blue
- Arm direction optional: leftward / rightward


Retractable Gates

- Anti-wind hooks: prevent the gate overturn by strong wind
- Anti-climb-over alarm: alarming once anybody climbing over gate
- Caution light: it will twinkle during gate sliding
- Speed clutch: rotate the clutch to switch electric control or manual control
- Wireless remote control: with maximum 50m effective distance
- Gate sliding speed: around 18m/min
- Standard equipped 8bits static screen or optional 500bits rolling screen
- Gate length and Height can be customized



VS-07

Electric Gates

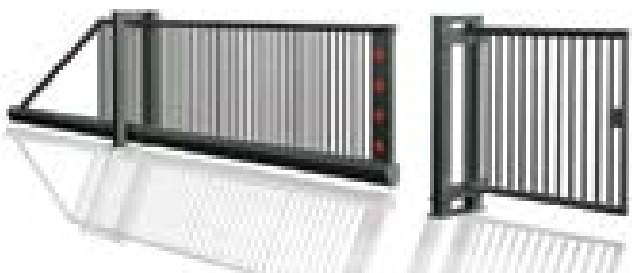

- Full Auto Telescopic Gates
- Cantilever Gates
- Swing Gate Automatic
- Industrial Auto Shutter



Metal Detector



JKDM-3003B1

- Elegant appearance, super sensitivity.
- Low battery light
- Vibration sensitivity: 3cm,
- Audio alert and LED and vibration



MODEL-ESH-10

- Detects items of all types of metal: ferrous and non-ferrous.
- Choice of sound alarm or silent vibration alarm
- Easy to use,
- 3 position switch for power,
- sound and vibration Sensitivity setting at optimum level-no tuning
- required Uses one 9V battery Low battery indicator



GARRETT SUPER SCANNER


- Indicators: Speaker, LED Alert Lights Green
- Power ON Power switch (Audible / Off / Silent)
- 9 volt battery provides up to 100 hours of normal operation.
- Optional NiMH rechargeable battery provides up to 45 hours on a single charge.




ThruSec

- Easy to operate, equipped with leather, for carrying
- Detection sensitivity: diameter 2.5mm ball
- Power supply: 9 volt battery (6f22nd) (not include)
- Power consumption: 270mw
- Operating frequency: 22khz
- The working current: less than 50ma

Electronic Article Surveillance

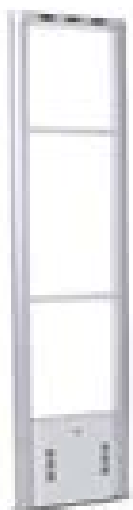

Transmitter

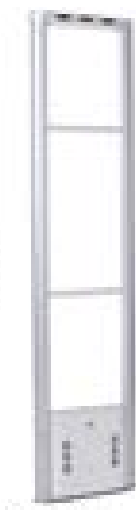

Receiver



Soft Tag



Hard Tag



Soft Tag Deactivator

A new tag to protect clothing, hand bags, bicycles, books, painting, electrical items, sports goods, leathers etc.

Walk-Through Metal Detectors



XYT2101LCD
(8-16-24 zones)

- Anti-interference
- 4 hours Battery Backup
- 6-18/8-24 Zones Can Be Chosen
- Program Self-diagnose When Power On
- Sensitivity Adjustable: 0-255 Steps
- 21 Present Programs For Working Applications
- Adopt DSP Replaced Traditional Analog Signal Control
- Friendly Windows Interface, Easy To Operate



XYT2101A6
(6 zones)

- Sensitivity Adjustable: Each Zone Has 100 Degree Sensitivity.
- Six Mutual Over-Lapping Detecting Zones; Simultaneous Alarm From Multi-Zones.
- 16 LED Indicator Lights For Metal Signal On The Panel.
- Easy Operating, Each Function Setting With Corresponding Keys.
- Automatically Count Passengers And Alarm Times.

X-ray Baggage Scanner



XJ10080

- Tunnel Size: 1000(W)x800(H)mm
- Conveyor Speed: 0.22m/s
- Conveyor Max Load: 230 kg
- Single Inspection Dosage: <1.5μGy
- Leakage Radiation: <0.2μGy/h
- Wire Resolution: 38AWG
- Steel Penetration: 38mm Arma Plate



XJ100100

- Tunnel Size: 1000(W)x1000(H)mm
- Power Requirement: 220V AC (±10%) 50±3Hz
- Power Consumption: 1.0KW (Max)
- Noise Level: <58dB
- Conveyor Speed: 0.22m/s
- Conveyor Max Load: 250 kg
- Single Inspection Dosage: <1.6μGy

Walkie-talkie



TC223

- 16 Memory Channels
- Low Battery Warning
- Power save function
- Programmable by PC
- Built-in CTCSS Function
- Time out Timer
- Sturdy and Durability Better
- Frequency Range:
UHF(450-480MHz)

- Power Output 5w
- High Capacity Li-ion Battery Pack
- 16 Memory Channels
- Programmable by PC
- Built in CTCSS / DCS Function
- High Definition Audio Output
- Smart Charger
- Frequency Range: UHF(400-480MHz)
VHF(136-174MHz)



TC688:



IT-58

- Programmable with PC
- Battery Automatic power saving
- Searching channel
- Function of safe asking
- Electricity inquires the function
- Low electrical detection function
- Multi-function alarm
- Intelligent voice broadcast
- Circumscription of frequency :
400-470MHz



MC-700

- Large Volume
- Pc Programmable
- Electronic tuning
- Professional radio
- High capacity battery
- Super long standby time
- long range communication




GP328 PLUS

- Tri-color LED battery gauge: indicates
- High- speed rate of 1200 bits per second.
- Switchable RF Power Levels: with one button
- Tone Tagging allows 8 different ringing tones
- By pressing the emergency button in critical situations,
- The Forward error correction technology enables radio to receive message,
- The GP328 Plus is intrinsically safe to operate in hazardous atmosphere certified



We Provided BTRC License Support.
Please Don't use illegal Walkie talkie

IP Telephone

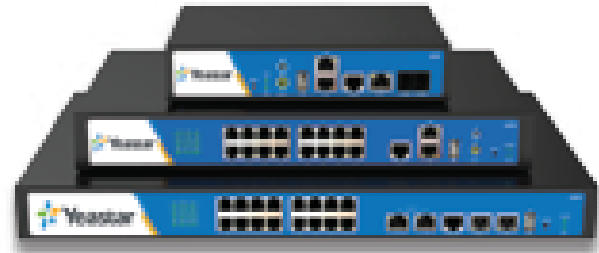

C600

- Android 4.2 OS
- Supports HDMI & USB Host
- Supports high quality video call
- On Line Recording & Message Forwarding
- Support LDAP & XML Phone Book
- 7" TFT 800x480 Capacitive Multi Touch Screen



X3P (B)


- Web Management Portal
- Smart and friendly user interface
- Easy installation and configuration
- The finest artwork in IP telephone industry

S20



S50

- User 20/50
- Concurrent Calls (Max): 10/25
- Support: GSM, VOIP Protocol analog port support
- Add-ons : Call Recording, Skype Integration, Music on Hold, Email to SMS/SMS to Email

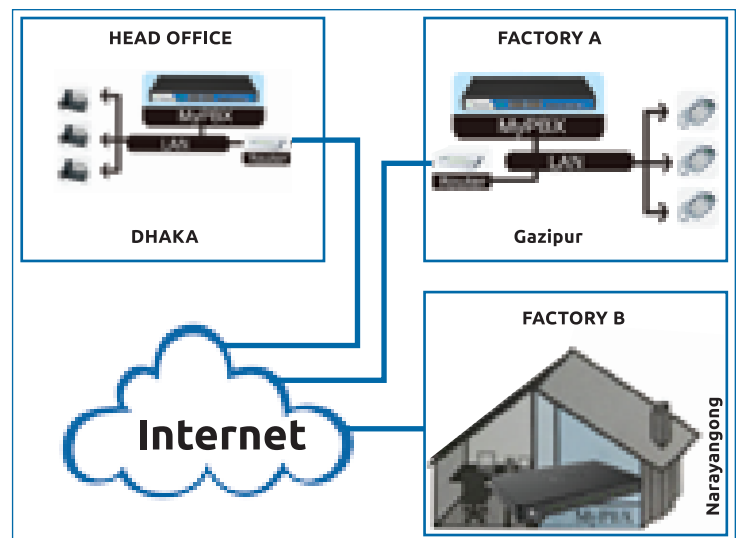


Oil Only, Universal & Hazmat Spill Kits

- Spill kits are used to control, contain and clean up spills.
- Spill kit solutions for a quick response to any spill.
- Fast and effective clean-up of liquid spills.
- Innovative and environmentally friendly process.

Note:

- Available in 5,20,30,50,65 & 95 Gallons
- Rolls / Booms/ Pillows - inclusion depends on absorption capacity.

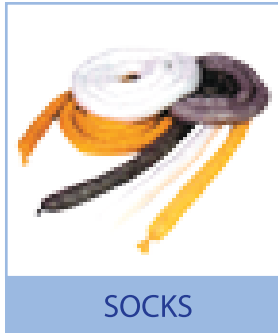

Dispensing & Spill Pallets



- Easy Loading and Dispensing
- Reduces drum handling & improves safety
- Transports, tilts and dispenses up to 205 liter hazardous liquid drums
- Secondary containment unit with convenient drain plugs

4 DRUM POLY-SUM LINE

- 100% polyethylene
- Holds 4 * 205 liter drums
- two removable, non-skid grates
- Drain hole and plug
- 250 liters sump capacity



Note: Available 2 Drum Poly-Spillpallet

Poly Racker - Stacker System



- Poly-Racker forms the base and the stacker allows multiple rows for storage and dispensing
- Load using materials handling equipment
- Patented enclosed sump holds 386 liters
- Each Poly-Stacker holds 2 x 205 liter drums
- Store up to 6 drums using this system
- Optional Poly-Shelf easily attaches to Poly-Stacker for safer, simultaneous drum dispensing

Safety Cabinet



Offers a lot of space for safely storing all types of hazardous substances

- Cabinet for acid and lye
- Consisting of: Safety cabinet CLASSIC S
- Air connection on the top of the cabinet
- With 2 compartments and 6 pull-out PE-shelves
- Outer carcass of powder coated sheet steel in RAL 7035 light-grey
- Doors in RAL 1018 zinc yellow with bottom tray, 1 shelf, 1 perforated sheet insert in RAL 7035 light-grey
- TÜV-tested according to DIN EN 14727 (laboratory furniture standard)




Style 39-201270-067

Style 29-20-1261-041



- Safety cabinet with one-hand wing door technology.
- Outer carcass: 1195 x 595 x 2080 (WxDxH) mm,
- Inner carcass: 1099 x 446 x 1830 (WxDxH) mm,
- Outer carcass, sheet steel, powder-coated in
- RAL 7035 light grey,
- Wing doors in RAL 1018 zinc yellow,

Harnesses

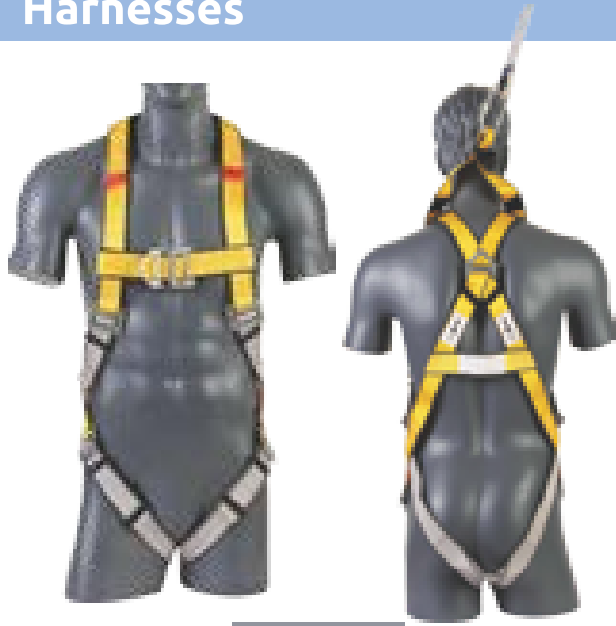

UEE-274

Multipurpose full body harness with Tell Tale indicator used in sewers, wells, silos, tanks and rescue

- Size: Medium / Large
- Compliance: Confirms to EN 361
- Anchor Point: Dorsal D-Ring with extended loop for
- rescuing from confined space
- Ergonomics: Easy to attach the webbing loop in the back
- to rescue a person, adjustable thigh straps and shoulder strap

APPLICATIONS

FALL ARREST



ORK POSITIONING



CONFINED SPACE



UEE-285P/DP

Multipurpose full body harness with Tell Tale indicator used in sewers, wells, silos, tanks and rescue

- waist belt.
- Size: Standard
- Compliance: Confirms to
- EN 361:2002 & EN 358:1999
- Anchor Point: Dorsal attachment D-ring
- Ergonomics: 2 lateral positioning D-Rings
- and back brace comfort pad with tool holder
- loops and rings, adjustable thigh strap and

WER and TELECOM



SCAFFOLDING/ CONSTRUCTION



ROOFING



RESCUE



UEE-296P/DP

Multipurpose full body harness with Tell Tale indicator used in sewers, wells, silos, tanks and rescue

- Anchor Point : One Dorsal D-ring with provision special Design Distributor & 2 work positioning large D-Ring with 2 Belay loops at the front.
- Ergonomics: Attachment of textile loop at the front side can be used as a single connection point by using a Y-connection.
- Compliance : Confirms to EN 358 &
- EN 361 Certification : CE, 11 b directive

Lanyards


- UEE 413 ADJUSTABLE WORK-POSITIONING ROPE LANYARD
- with UEE 302 Karabiners at both ends
- Material: 3 Strand Polyamide rope
- Diameter: Minimum 11mm
- Length: Adjustable to a max. of 2m
- Breaking Strength: 22kN
- Compliance: Conforms to En 354:2010



UEE 413

Securing/Supporting Polyimide Webbing Lanyard to be used as a connecting element or component of a fall arrest system

- UEE 406 Polyamide Webbing Lanyard
- With UEE 300 Hook on both ends
- Webbing: Polyamide
- Width: 44mm +/- 1mm
- Breaking Strength: 22kN
- Compliance: Confirms to EN 354:2010

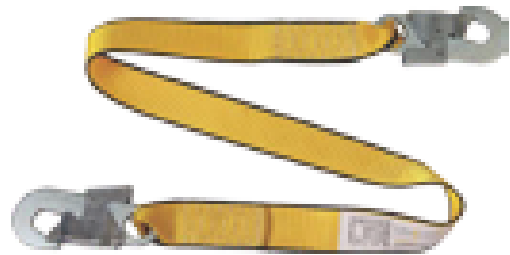

UEE 406

HT 9 Evacuation Harness

- Specialist Evacuation Harness -
- Easily installed. 3 adjustment settings.
- Suitable for use with both adults and children.



Lanyards



UEE111

Unicare Plastic Face Shield with acrylic visor

Feature:

- Extra Large brow & chin guard for protection against chemical splash/flying with ratchet type adjustable head gear.
- Visor size 14.5" x 8" and 14.5" x 6"



UEE 186

MAX VIZ UEE 186

Features:

- Wrap around protective eyewear combining fashion,
- Fit and function, Adjustable temple length with soft nose bridge,
- Anti scratch and fog coated lens on both sides.



UEE 187

MAX VIX UEE 187

Features:

- Spectacle with foam lining to prevent infiltration of dust
- Indirect ventilation to prevent fogging
- Extended brow guard with Pantoscopic frame adjustment.



UEE 181

MAX OTS UEE 181

Features:

- Stylish over spectacle offering integral & lateral protection,
- Heavy duty inclination system-allow in a Pantoscopic adjustment,
- Anti scratch and anti fog coating



UEE 171

MAX ULTRA UEE 171

Features:

- Wide vision goggle designed to give optimum fit to all facial contours,
- Fits over almost all prescription eyewear,
- Wrap around modern style provides excellent panoramic vision,
- Anti scratch and anti fog coated lens on both sides,

Emergency Eye/ Face Wash

Models in Stainless Steel



CSS 304

Eye / Face Wash-
Push lever operated



LSE 1A GI

Eye / Face Wash- Foot
pedal operated

Portable Eye Wash



Model No	LPM	Capacity
UPEW 14	2 LPM	34 liters
UPEW 15	3 LPM	56 liters



UPEW 15



UEWB 12



UPEW 14

Application:

- Chemical and pharmaceutical site.
- Fire and Emergency Teams, Hazmat vehicles.
- Remote places in Mining, Agriculture and Construction.



UPEW 14

Foot Pedal Operated Eye/Face Wash



Laboratory Faucet



- Simple & easy to use.
- Activate the eyewash in a single motion.
- Diverter value for eyewash & control value for Faucet.
- Mimics the operation of a conventional tap.
- Safe, steady water flow.
- Recommended pressure :30PSI/2 kg/cm2
- Supply BSP
- Drain 1 BSP
- Twin cushion-flow Cycloid Atomizer Heads in high visibility Yellow/Black with flip-flop dust covers that protect heads that automatically release with soft water pressure. Pedal type operate by foot



LSE 1 GI
Eye / Face Wash- Foot
pedal operated



LSE 2 GI
Eye / Face Wash-
Push lever operated




Eye/Face wash and body spray
with 6' house, Squeeze valve-
Wall Bracketed



Eye/Face Wash Push
Lever Operated-Wall
mounted.


Safety Showers & Combination Unit

Also Available in GI

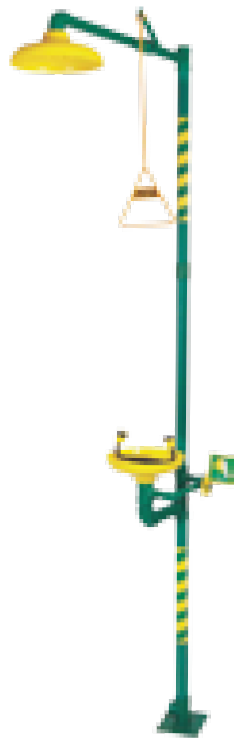


LSES 7 GI

Eye/Face wash and shower operate independently by push lever and pull rod

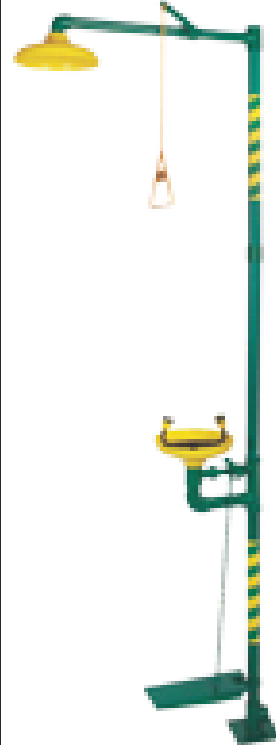

LSES 8 GI

Eye/Face wash and shower operate independently by foot pedal and pull rod.

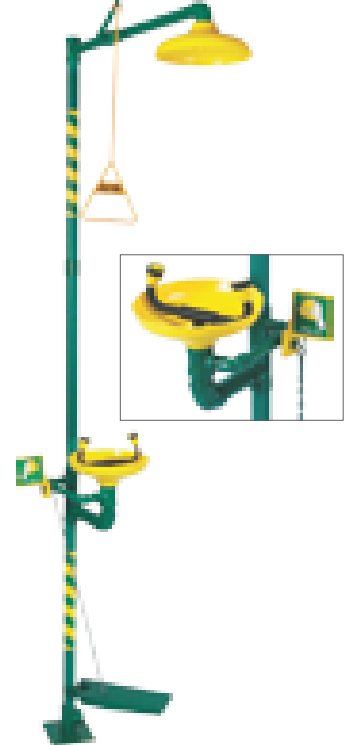


LSES 7/8 GI

Eye/Face wash and shower operate independently by foot pedal /push lever and pull rod.

Also Available in Stainless Steel



LSES 7 CSS 304

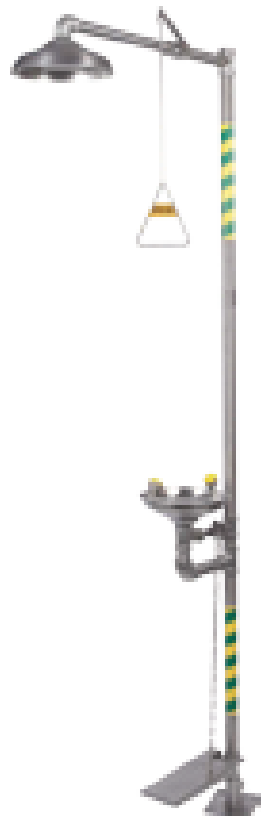

LSES 8 CSS 304



LSES 7/8 CSS 304

Eye Wash Station



S250



SS-S150

Features:

- Piping Material: Galvanized Steel/ Stainless Steel 304.
- Eyewash Bowl: ABS in safety green color / Stainless Steel 304..
- Eyewash Head: Twin Sprayers with dust cover.
- Eyewash Valve: 1/2" chrome plated brass ball valve / stainless steel 304 ball valve..
- Eyewash Activation: By push handle or foot pedal.
- Water Supply: 1/2"IPS Outlet: 1-1/4"IPS.



E-150-R



E150

EN15154-1&2 Certificate (CE)



ANSI Z358.1 Certificate



AS 4775 Certificate




- Piping Material: Galvanized Steel / Stainless Steel 304.
- Shower Head: 250mm ABS in safety green color / Stainless Steel 304.
- Shower Valve: 1" corrosion-resistant brass ball valve / stainless steel 304 ball valve.
- Shower Activation: By pull rod stainless steel 304.
- Eyewash Bowl: ABS in safety green color / Stainless Steel 304.
- Eyewash Head: 2 Sprayers with dust cover.
- Eyewash Valve: 1/2" corrosion-resistant brass ball valve / stainless steel 304 ball valve.
- Eyewash Activation: By push handle or foot pedal.
- Water Supply/Outlet: 1-1/4"IPS.
- Flow Control: 114L/Min.
- Water Working Pressure: 0.2-0.8MPa

Our Partners



OLEFINS Trade Corporation

Behind Experience & Success...



PRODUCT LINEUP CATALOG

Operating Address:

House No # 16/A-2, Block # F, 5th Floor, Ring Road,
Mohammadpur, Dhaka-1207, Bangladesh.
Telephone: +88 02 9113552, +88 01979 300 940
E-mail: info@olefins.com.bd

Registered Address:

House No # 12/A-2, Joint Quarter, Madrasa Road,
Mohammadpur, Dhaka-1207, Bangladesh.
Telephone: +88 02 9113552.