



永達貨運公司

Since 1973

SPECIALIST IN TRUCK & TRAILER COMPONENTS

WING TAT CARGOES SERVICE COMPANY

**Address: 286A, TUNG CHAU STREET, G/F.,
SHAM SHUI PO, KOWLOON, HONG KONG**

Tel: (852) 64858663 / (852) 61498148

Fax: (852) 27257968

E-mail: wtcargoesservice@gmail.com

Website: www.wtcargoesservice.weebly.com

Company Profile


Wing Tat Cargoes Service Co. Since 1973, Wing Tat Cargoes Service Co. has been worked for automotive parts and accessories, focusing on truck, trailer and heavy duty market over 30 years and devoted to provide high quality parts. All of our products are manufactured on OEM basis and distributed to both local and international semi-trailer markets including USA, Canada, UK, South Africa, Malaysia, Taiwan, Korea as well as Australia. Most of our products passed TUV, SAE, LINK-TEST, and American Dynamometer testing. We also provide quality products for aftermarket uses to suit different customer's needs.

Product Qualifications

Complied With:

- SAE (Society of Automotive Engineers)
- TUV
- LINK-TEST
- America Dynamometer Testing

SAE *International*®



Service Chambers



9 inch service chamber
P/N : CHAMBER-T9EB
Stroke : 45mm (1.75")



20 inch service chamber
P/N : CHAMBER-T20L
Stroke : 76mm (3")



12 inch service chamber
P/N : CHAMBER-T12EB
Stroke : 45mm (1.75")



24 inch service chamber
P/N : CHAMBER-T24EB
Stroke : 64mm (2.5")



16 inch service chamber
P/N : CHAMBER-T16EB
Stroke : 57mm (2.25")



24 inch service chamber
P/N : CHAMBER-T24L
Stroke : 76mm (3")



20 inch service chamber
P/N : CHAMBER-T20EB
Stroke : 57mm (2.25")



30 inch service chamber
P/N : CHAMBER-T30L
Stroke : 76mm (3")



30 inch service chamber
P/N : CHAMBER-T30EB
Stroke : 64mm (2.5")



30 inch service chamber
P/N : CHAMBER-T30EY
Stroke : 64mm (2.5")

Spring Brakes



12/16 inch spring brake
P/N : CHAMBER-T1216EB
Stroke : 45mm (1.75")



24/24 inch spring brake
P/N : CHAMBER-T2424EB
Stroke : 64mm (2.5")



16/24 inch spring brake
P/N : CHAMBER-T1624MB
Stroke : 64mm (2.5")



24/24 inch spring brake
P/N : CHAMBER-T2424EY
Stroke : 64mm (2.5")



20/24 inch spring brake
P/N : CHAMBER-T2024EY
Stroke : 64mm (2.5")



24/30 inch spring brake
P/N : CHAMBER-T2430MB
Stroke : 64mm (2.5")



24/30 inch spring brake
P/N : CHAMBER-T2430LMY
Stroke : 76mm (3")



24/30 inch spring brake
P/N : CHAMBER-T2430EY
Stroke : 64mm (2.5")



30/30 inch spring brake
P/N : CHAMBER-T3030MB
Stroke : 64mm (2.5")



30/30 inch spring brake
P/N : CHAMBER-T3030EY
Stroke : 64mm (2.5")



30/30 inch spring brake
P/N : CHAMBER-T3030ER
Stroke : 64mm (2.5")



30/30 inch spring brake (sealed)
P/N : CHAMBER-T3030EBS
Stroke : 64mm (2.5")



30/30 inch spring brake (sealed)
P/N : CHAMBER-T3030LEBS
Stroke : 76mm (3")

Piggyback Kits



Mud Flap Hangers

MODEL : MFH2657 (Black)

STD PK/PALLET

30 PAIRS



- 1) Heavy Duty Spring Loaded
- 2) 30.25" Straight 1.18" Bolt Spacing

MODEL : MFH2657NT (Black)

STD PK/PALLET

30 PAIRS



- 1) Heavy Duty Spring Loaded
- 2) 30.25" Straight 1.18" Bolt Spacing

MODEL : MFH2657SNT (Stainless Steel)

STD PK/PALLET

30 PAIRS



- 1) Heavy Duty Spring Loaded
- 2) 30.25" Straight 1.18" Bolt Spacing

MODEL : MFH2667 (Black)

STD PK/PALLET

22 PAIRS



- 1) Heavy Duty Spring Loaded
- 2) 30.25" Straight 1.18" Bolt Spacing

MODEL : MFH2667NT (Black)

STD PK/PALLET

22 PAIRS



- 1) Heavy Duty Spring Loaded
- 2) 30.25" Straight 1.18" Bolt Spacing

MODEL : MFH2667S (Stainless Steel)

STD PK/PALLET

22 PAIRS



- 1) Heavy Duty Spring Loaded
- 2) 30.25" Straight 1.18" Bolt Spacing

Mud Flaps

RUBBER (ECONOMY 1/4")

P/N	Desc
MF2424R	24"×24"
MF2430R	24"×30"
MF2436R	24"×36"

PLASTIC

P/N	Description
MF2424PSB	24"×24" Black
MF2424PSW	24"×24" White
MF2430PSB	24"×30" Black
MF2436PSB	24"×36" Black
MF2436PSW	24"×36" White

PREMIUM W/WIRE MESH

P/N	Desc
MF2424PR	24"×24"
MF2430PR	24"×30"
MF2436PR	24"×36"
MF2440PR	24"×40"

A-Series Manual Slack Adjusters



P/N	Midland No.	Bush Dia.				Hole Dia.	Spline
		A	B	C	D		
2010AF	KN47001	5"	6"	7"		1/2"	10 splines
2020AF	KN47011	5 1/2"	6 1/2"			1/2"	10 splines
2021AF	KN47081	5"	6"			1/2"	10 splines
18048AF	18-048	5"	6"	7"	8"	1/2"	10 splines
18057AF	18-057	127	152	178	203	14mm	10 splines
18880AF	18-880	4 1/2"	5 1/2"	6 1/2"	7 1/2"	1/2"	10 splines
2011AF	KN44051	5"	6"			1/2"	28 splines
2019AF	KN44061	5 1/2"	6 1/2"			1/2"	28 splines
2022AF	KN44071	5"	6"	7"		1/2"	28 splines
2012AF	KN44041		6"			1/2"	37 splines
2023AF		5"	6"			1/2"	37 splines
2024AF	KN44042	5"	6"	7"		1/2"	37 splines
18116AF	18-116	5"	6"	7"	8"	1/2"	37 splines

B-Series Manual Slack Adjusters












P/N	Midland No.	Bush Dia.				Hole Dia.	Spline
		A	B	C	D		
278323AF	KN47001	5"	6"	7"		1/2"	10 splines
278321AF	KN47011	5 1/2"	6 1/2"			1/2"	10 splines
278312AF	KN47081	5"	6"			1/2"	10 splines
278326AF		5 1/2"	6 1/2"			1/2"	10 splines
278302AF	KN48031	4 1/2"	5 1/2"			1/2"	10 splines
278303AF	KN48001	5"	6"			1/2"	10 splines
278305AF	KN48002	5"	6"	7"		1/2"	10 splines
288282AF	KN44071	5"	6"	7"		1/2"	28 splines
288753AF	KN44061	5 1/2"	6 1/2"			1/2"	28 splines
286965AF	KN44051	5"	6"			1/2"	28 splines
283411AF			6"			1/2"	37 splines
61137370AF		5"	6"	7"		1/2"	37 splines

E-Series Euro-Style Manual Slack Adjusters

P/N	Original No.	Spline	Bush Dia.						
			A-φ	B-φ	C-φ	D-φ	E-φ	F-φ	G-φ
788105	767.0058	37	105/14	130/14	150/14	180/14	215/18		
788106	281.852	27	125/14	155/14	185/14	210/14	245/14		
788107	281.853	27	125/12.7	155/12.7	185/12.7	210/12.7	245/12.7		
788213	05.174.65.13.0	10	120/14	135/14	150/14	165/14	180/14	195/14	250/14
788214	05.174.52.34.0	10	120/14	150/14	180/14				
788217	05.174.52.61.0	10	120/14	150/14	180/14	220/14	250/14		
788404	346.420.17.38	26	145/14						
788405	346.420.18.38	26	145/14						
788714	0351.949	10	152/12.7						
788715	0351.950	10	152/12.7						
788718	1505.325	10	140/12.7	165/12.7					
788719	1505.324	10	140/12.7	165/12.7					
788808	13.180	10	127/14	152/14	178/14	203/14			

Automatic Slack Adjusters



Offset Manual Slack Adjusters



Part NO.	Rated Torque	Spline Size	Body Parameter					Straight/Offset	Pin Hole	Replaces
			A	B	C	D	OAL			
288539AF	PL20	1-1/2" -10	5.5"	6.5"			193MM	RH-1.5"	1/2"	288539
288541AF	PL20	1-1/2" -10	5"	6"			193MM	RH-1.5"	1/2"	288541
279350AF	PL20	1-1/2" -10	7"				193MM	RH-1.5"	1/2"	279350
287896AF	PL20	1-1/2" -28	5.5"	6.5"			193MM	RH-1.5"	1/2"	287896
101414AF	PL20	1-1/2" -28	5.5"				193MM	RH-1.5"	1/2"	101414



Part NO.	Rated Torque	Spline Size	Body Parameter					Straight/Offset	Pin Hole	Replaces
			A	B	C	D	OAL			
288540AF	PL20	1-1/2" -10	5.5"	6.5"			193MM	LH-1.5"	1/2"	288540
288542AF	PL20	1-1/2" -10	5"	6"			193MM	LH-1.5"	1/2"	288542
279351AF	PL20	1-1/2" -10	7"				193MM	LH-1.5"	1/2"	279351
287897AF	PL20	1-1/2" -28	5.5"	6.5"			193MM	LH-1.5"	1/2"	287897
101413AF	PL20	1-1/2" -28	5.5"				193MM	LH-1.5"	1/2"	101413



Part NO.	Rated Torque	Spline Size	Body Parameter					Straight/Offset	Pin Hole	Replaces
			A	B	C	D	OAL			
279947AF	PL26	1-1/2" -10	6"	7"			193MM	LH-5/8"	1/2"	279947
282561AF	PL26	1-1/2" -10	5.5"	6.5"			193MM	LH-5/8"	1/2"	282561




Part NO.	Rated Torque	Spline Size	Body Parameter					Straight/Offset	Pin Hole	Replaces
			A	B	C	D	OAL			
279946AF	PL26	1-1/2" -10	6"	7"			193MM	RH-5/8"	1/2"	279946
282560AF	PL26	1-1/2" -10	5.5"	6.5"			193MM	RH-5/8"	1/2"	282560

Brake Shoes



Fmsi No.	Application	Std PK	Item No.	Fmsi No.	Application	Std PK
4515Q	Meritor 16-1/2×7 "Q"	100	MBA84702	4702Q	Meritor 15×4"Q-Plus"	200
4515P	Meritor 16-1/2×7 "Q"	100	MBA84311	4311E	Eaton 16-1/2×7	100
4515P + WASHER	Meritor 16-1/2×7 "Q"	100	MBA84707	4707Q	Meritor 16-1/2×7 "Q-Plus"	100
4515XEM3	Fruehauf 16-1/2×7	100	MBA81443	1443E	Eaton 15×4"ES"	200
4515X	Fruehauf 16-1/2×7	100	MBA84551E	4551Q		100
1308E	Eaton 15×4	200	MBA84551Q	4551P		100
1308P	Meritor 15×4"Q"	200	MBA84524	4524Q	Meritor 16-1/2×5"Q"	200
1308Q	Meritor 15×4"Q"	200	MBA84591	4591SF		100
4709E	Eaton 16-1/2×7 "ES-II"	100				

Brake Drums



Item No.	Brake Drum	Application	Item No.	Brake Drum	Application
K60301	60876	WEBB	K60312	3600A	GUNITE
K60302	62200	WEBB	K60313	555-01163	KIC
K60303	66250	WEBB	K60314	555-01169	KIC
K60304	66864	WEBB	K60315	555-16729	KIC
K60305	66884	WEBB	K60316	AV-0002-001	KIC
K60306	66892	WEBB	K60317	AY-M1210205	KIC
K60307	66893	WEBB	K60318	555-66879	KIC
K60308	66895	WEBB	K60319	555-16325	KIC
K60309	68730	WEBB	K60320	51961-10	KIC
K60310	67518	WEBB	K60321	52890-13	KIC
K60311	68765	WEBB	K60322	52647-11	KIC



Air Brake Diaphragm

Good quality with reinforcing material

P/N	DESC.	P/N	DESC.
DIAPHRAGM-9"	5"	DIAPHRAGM-20" & 20"L	6 1/2"
DIAPHRAGM-12"	5 1/2"	DIAPHRAGM-24" & 24"L	7"
DIAPHRAGM-16" & 16"L	6"	DIAPHRAGM-30" & 30"L	8"



Axles



1. One-piece heat forged forming axle beam made of high strength alloy steel. No welding. Best solution to resist breaking or bending and ensuring long durability of the tire. Meet USA FMVSS-121 standard.
2. Forged camshafts with hardened surface.
3. Induction heat treatment on spindle.
4. High performance non-asbestos brake lining conforming to the environment laws.
5. In-board and out-board brake drum available.
6. Long life taper roller bearings and self-sealing system without wearing the axle neck.
7. Brake adjuster with forged steel and chrome steel worm gear. Over SAE standard design.
8. Available with ABS fixing features.

Part No.	Track	Brake Size	Beam size	Wall	Cam Length	Bearing	Capacity	Cross Ref.	Pdc
AOT1B16W58B43C2	71.5	16.5" x 7"	5" round	5/8"	23.75"	S414,S413	25000	D22AX603A1275-867875	P512S
AOT1B16W12B43C1	71.5	16.5" x 7"	5" round	1/2"	20.625"	S414,S413	22500	D22AX503A1314-868300	P518L
AOT1B16W58B55C2	71.5	16.5" x 7"	5" round	5/8"	24.14"	S415	25000	TP8671QR1350	P5P18L
AOT1B12W12B43C1	71.5	12.25"x7.5"	5" round	1/2"	20.625"	S414,S413	22500	D22AX503A1510-984154	P5LB12S
AOT1B12W58B43C2	71.5	12.25"x7.5"	5" round	5/8"	23.38"	S414,S413	25000	D22AX603A1414-983053	P5LB18L
AOT7B16W58B43C2	77.5	16.5" x 7"	5" round	5/8"	23.75"	S414,S413	25000	D22AX603A1276-983055	P578L
AOT7B16W58B55C2	77.5	16.5" x 7"	5" round	5/8"	24.14"	S415	25000	TP8671QR7350	P5P78L
AOT7B12W12B43C1	77.5	12.25"x7.5"	5" round	1/2"	23.38"	S414,S413	22500		
AOT7B12W58B43C2	77.5	12.25"x7.5"	5" round	5/8"	23.38"	S414,S413	25000	D22AX603A1369-982445	P5LB78L
AOT7B16W12B43C1	77.5	16.5"X7"	5" round	1/2"	20.625"	S414,S413	22500	D22AX503A1330-982739	P572S

O=ROUND

$$B16=16.5 \times 7$$
$$W_{12} = 1/2$$

B43=S414, S413

C1=22500

$T_1 = 71.5$

S=SQUARE

$$B12=12.25*7.5$$

W58=5/8

$$B55=S415*2$$

C2=25000

$$T_2 = 72.8$$

W34=3/4

C3=30000

T7=77.5

C4=26400

Conspicuity Tape

Model#	Description	Width	Red	White	Yellow	Total Length
RW66-2	2"×12" strip of 6" Red / 6" White Tape	2"	6"	6"		12"
RW117-2	2"×18" strip of 11" Red / 7" White Tape	2"	11"	7"		18"
RW66-2X150	2"×150' of 6" Red / 6" White Tape	2"	6"	6"		150'
RW117-2X150	2"×150' of 11" Red / 7" White Tape	2"	11"	7"		150'
RW44-2X150	2"×150' of 4" Red / 4" White Tape	2"	4"	4"		150'
R2X150	2"×150' Red Reflective Tape	2"	WHOLE			150'
W2X150	2"×150' White Reflective Tape	2"		WHOLE		150'
Y2X150	2"×150' Yellow School Bus Tape	2"			WHOLE	150'



RW66-2X150

U-Joints

More than 30 models are available



Spicer	Pcs/Ctn	Spicer	Pcs/Ctn	Spicer	Pcs/Ctn	Spicer	Pcs/Ctn
5-279X	5	5-153X	50	5-407X	4	5-170X	80
5-280X	5	5-155X	10	5-675X	5	5-178X	48
5-281X	4	5-160X	32	5-676X	4	5-188X	20

U-Bolt Kits

Kit includes: 2 U-bolts. 4 Washers & 4 Nuts



P/N	Diam.(d)	Between Legs (b)	Leg Length	Thread	Replace BWP	Replace Dayton
UBK-7830012	7/8"	3"	12"	7/8"-14	M-1499	361-248
UBK-7830014	7/8"	3"	14"	7/8"-14	M-1492	361-218
UBK-7830015	7/8"	3"	15"	7/8"-14		361-584
UBK-7830016	7/8"	3"	16"	7/8"-14	M1497	361-492
UBK-7830018	7/8"	3"	18"	7/8"-14	M1493	361-250
UBK-7831215	7/8"	3 1/2"	15"	7/8"-14		
UBK-7850012	7/8"	5"	12"	7/8"-14		
UBK-7850015	7/8"	5"	15"	7/8"-14		

Wheel Studs & Nuts

Replace Dayton	Replace BWP	Replace Euclid	Replace Sirco
Metric Serrated Studs			
	M-3659	E10219	437
13-1552	M-3663	E10221	676
13-1577	M-3667	E10676	881M
13-3050	M-3207	E5991	160
Clipped Collar Shoulder Studs			
13-1006L/R	M-57/56	E5551L/R	125/124
13-1008L/R	M-61/60	E5553L/R	272/271
13-1002L/R	M-49/48	E5556L/R	095/096
Front Wheel Studs			
13-1618L/R	M-2431/2430	E5982L/R	
13-1630L/R	M-3633/3632	E8972L/R	
Serrated Wheel Studs			
	M-3653/3652	E10208L/R	
13-1102L/R	M-75/74	E4965L/R	192/191
13-1144L/R		E4966L/R	
13-1103L/R		E4967L/R	
Inner/Outer Cap Nuts			
13-3017L/R		E5576L/R	
13-3016L/R	M-167/166	E5579L/R	913/912
13-3034L/R		E5987L/R	978L/R
13-3013L/R	M-125/124	E5652L/R	889L/888R



Leaf Springs



Part No .	Leaves	Arch (mm)	Main Leaf Flat Diameter (mm)	Replace	Part No .	Leaves	Arch (mm)	Main Leaf Flat Diameter (mm)	Replace
MBA182256	7	108	1111	TRA-2256	MBA182741	3	86/78	1070	TRA-2741
MBA182726	3	159/144.5	1139	TRA-2726	MBA18693	3	105.5	1034	TRA-693
MBA182727	3	124/105	1091	TRA-2727	MBA18696	9	63.5	1056	TRA-696
MBA182728	3	97/89	1080	TRA-2728	MBA18697	3	35.8		TRA-697
MBA182740	3	146/131.8	1098	TRA-2740	MBA18699	4	106	1041	TRA-699

Note: Please contact us for other model

Brake Repair Kits


Application & Cross Reference



E-2769SHD



E-10244




E-9644



E-3895SHD




E-5481A



E-5139



E-1816SHD



E-1887AHD

Replace Euclid	Replace Sirco	Replace Bwp	Replace Batco
E-10244	ES-2	M-K105	08-1149
E-10679		M-K110	08-107303
E-10756	LB-10	M-K108	08-104900
E-10757	LB-11	M-K109	08-105000
E-10760	EF-2	M-K113	08-114920
E-10841	BK-145F		
E-10870	BK-145R		
E-10875	LB-3D	M-K112	08-104700
E-1607HD	TK-7HD	M-K56	08-1082
E-1812		M-K44	08-1072
E-1816SHD	TK-4HD	M-K2 / M-K7	08-1003
E-1887ASHD		M-K10	08-1042
E-1887SHD	EK-1HD	M-K99	
E-2030HD		M-K11	08-1073
E-2121	FK-1	M-K8	08-1006
E-2126	LB-4	M-K46	08-1076
E-2286	LB-5	M-K47	08-1077

Replace Euclid	Replace Sirco	Replace Bwp	Replace Batco
E-2402HD	LB-1	M-K12	08-1074
E-2403HD		M-K43	08-1075
E-2675HD	MK-1HD	M-K54	08-1083
E-2676		M-K55	08-1081
E-2713		M-K51	08-1084
E-2740		M-K49	08-1102
E-2769SHD	QK-1HD	M-K39 / M-K72	08-1088
E-2821	EK-2	M-K58	08-1096
E-3291	WF-1	M-K50	08-1099
E-3373HD	LB-2		
E-3484	LB-3	M-K45	08-1093
E-3518	RK-1	M-K59	08-1098
E-3710HD	XK-3MPHD		
E-3710S	XK-3		
E-3710SHD	XK-3HD	M-K42	08-1091
E-3782	LB-6	M-K83	
E-3801	EK-3	M-K6	

Replace Euclid	Replace Sirco	Replace Bwp	Replace Batco
E-3858	MF-1	M-K92	
E-3869	RF-3	M-K79	08-1111
E-3895S	QK-2S		
E-3895SHD	QK-2HD		
E-3992	RK-2		08-1098
E-4691	RF-1ARK	M-K52	08-1107
E-4692		M-K53	08-1109
E-4880S	XK-1		
E-4880SHD	XK-1HD	M-K41	08-1090
E-5086	MK-2	M-K93	08-1115
E-5139	EF-1	M-K77	08-1113
E-5306	LB-7	M-K104	08-1051
E-5481A	ES-1	M-K84	08-1148
E-5515	XL-1	M-K91	08-1162
E-6999S	QK-8A		
E-6999SHD	QK-1A		

Replace Euclid	Replace Sirco	Replace Bwp	Replace Batco
E-7231	FF-1	M-K94	08-1140
E-7237	FR-1	M-K95	08-1142
E-7238	FR-1S		
E-7899	RF-3A	M-K79-B	08-1112
E-8923	EX-1		
E-8925	EQ-1		
E-9039	ES-4	M-K115	08-104330
E-9064	RF-5	M-K98	08-1160


Replace Euclid	Replace Sirco	Replace Bwp	Replace Batco
E-9070	MF-3		
E-9141	ES-3	M-K114	08-104300
E-9281	LB-9	M-K80	
E-9283	LB-8		
E-9644	MF-2	M-K106	08-111635
KIT 4S	TK-1	M-K3	08-1417
KIT 4SHD	TK-1HD	M-K4	08-1001
KIT 5	FK-2	M-K5	08-1005

Bearings

Tapered Roller Bearings



Set #	Cone #	Cup #	Pcs/Ctn	Set #	Cone #	Cup #	Pcs/Ctn
SET1	LM11749	LM11710	300	SET47	LM102949	LM102910	54
SET2	LM11949	LM11910	200	SET56	LM29748	LM29710	80
SET3	M12649	M12610	130	SET61	11590	11520	200
SET4	L44649	L44610	160	SET70	LM29749	LM29710	80
SET5	LM48548	LM48510	80	SET73	15101	15245	100
SET6	LM67048	LM67010	100	SET74	387A	382A	30
SET8	L45449	L45410	160	SET76	387AS	382A	30
SET9	U298	U261L	40	SET82	LM104949	LM104910	45
SET10	U399	U360L	30	SET401	580	572	8
SET11	JL69349	JL69310	100	SET403	594A	592A	8
SET12	LM12749	LM12710	200	SET404	598A	592A	8
SET13	L68149	L68110	100	SET405	663	653	8
SET14	L44643	L44610	160	SET406	3782	3720	28
SET16	LM12749	LM12711	200	SET407	28682	28622	30
SET17	L68149	L68111	100	SET408	39590	39520	22
SET24	JL68145	JL68111Z	100	SET410	45284	45220	24
SET34	LM12748	LM12710	200	SET411	47686	47620	14
SET37	LM603049	LM603011	50	SET413	HM212049	HM212011	12
SET42	57410S	LM29710S	80	SET414	HM218248	HM218210	10
SET45	LM501349	LM501310	54	SET415	HM518445	HM518410	10



Pilot Bearings

Bearing No	Boundary Dimensions(mm)				Basic Load Ratings(N)		Limiting Speeds RPM	Mass (kg)
	d	D	B	f _{smin}	Dynamic C _r	Static C _{or}		
6002-2RS	15	32	9	0.3	5600	2840	22000	0.032
6003-2RS	17	35	10	0.3	6800	3350	20000	0.042
6004-2RS	20	42	12	0.6	9400	5050	18000	0.072
6005-2RS	25	47	12	0.6	10400	5850	15000	0.085
6006-2RS	30	55	13	1.0	13200	8300	13000	0.120
6201-2RS	12	32	10	0.6	6100	2750	22000	0.040
6202-2RS	15	35	11	0.6	7750	3600	19000	0.048
6203-2RS	17	40	12	0.6	9600	4600	18000	0.072
6204-2RS	20	47	14	1.0	12800	6650	16000	0.110
6205-2RS	25	52	15	1.0	14000	7850	13000	0.132
6206-2RS	30	62	16	1.0	19500	11300	11000	0.208
6207-2RS	35	72	17	1.1	25700	15300	9800	0.300
6302-2RS	15	42	13	1.0	11400	5450	17000	0.085
6303-2RS	17	47	14	1.0	13500	6550	16000	0.120
6304-2RS	20	52	15	1.1	15900	7900	14000	0.150
6305-2RS	25	62	17	1.1	21200	10900	12000	0.240
W6203-2RS	17	40	17.5	0.6	9600	4600	18000	0.093
W6205-2RS	25	52	20.6	1.0	14000	7850	13000	0.177
W6305-2RS	25	62	25.4	1.1	21200	10900	12000	0.354

Clutch Release Bearings



P/N: CRB500044010
REPLACE: "Luk 500044010"
"INA F-217376"



P/N: CRB500090120
REPLACE: "Luk 500090120"
"INA FC 67430"



P/N: CRB500117211
REPLACE: "Luk 500117211"
"INA F-210152"



P/N: CRB500076610
REPLACE: "Luk 500076610"
"INA F-557607"



P/N: CRB500117210
REPLACE: "Luk 500117210"



P/N: CRB500044510
REPLACE: "Luk 500044510"



P/N: CRB500075810
REPLACE: "Luk 500075810"
"INA F-123536"

Hydraulic Clutch Release Bearings



REPLACE: 619003



REPLACE: "Luk 510 0001 10"



REPLACE: 619001 / 619002 / 619003



REPLACE: "Luk 510 0011 10"



REPLACE: 619002 / 619001 / 604187




REPLACE: "Luk 510 0046 10"




REPLACE: 90523765 / 96286828

Center Support Bearings

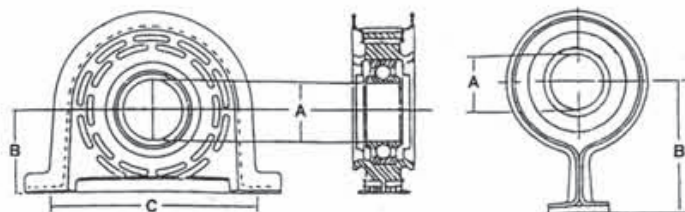

P/N	Type	A		B		C		Bearing No.	Slinger	Pcs/Ctn Bulk	Pcs/Ctn BTC Box
		inch	mm	inch	mm	inch	mm				
HB206FF	1	1.1810	30	1 1/2	38	3 1/2	89	6206-2RS	NO	-	-
HB88107A	2	1.3780	35	2 1/4	57	6 5/8	168	88107	NO	25	20
HB88508	3	1.5748	40	2 1/2	64	6 5/8	168	88508	NO	16	10
HB88508A	2	1.5748	40	2 1/4	57	6 5/8	168	88508A	NO	25	20
HB88509A	3	1.7717	45	2 23/32	70	7 5/8	194	88509	YES	12	8
HB88510S	3	1.9685	50	2 13/16	76	7 5/8	194	88510	YES	12	8
HB88512A	3	2.3622	60	3 3/8	86	8 5/8	219	88512	YES	8	6

Clevis

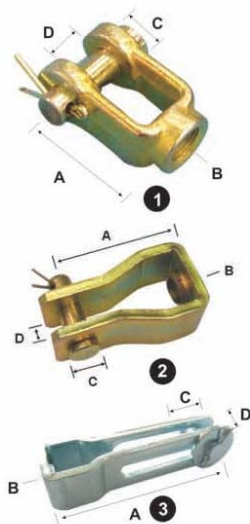

P/N	Description				Type
	A	B	C	D	
Y38050	1.88"	5/8"-18UNF	1/2"	9/16"	1
Y38056	2.00"	1/2"-20UNF	1/2"	9/16"	1
Y38057	2.00"	5/8"-18UNF	5/8"	9/16"	1
Y38058	2.00"	5/8"-18UNF	1/2"	9/16"	1
Y38059	1.75"	M16*1.5	1/2"	14.5 mm	1
Y38060	65 mm	5/8"-18UNF	1/2"	14.5 mm	2
Y38061	2.31"	5/8"-18UNF	1/2"	14.5 mm	1
Y38062	1.75"	M16*1.5	13.8 mm	14.5 mm	1
Y38063	65 mm	M16*1.5	13.8 mm	14.5 mm	2
Y38064	56 ~ 122 mm	M16*1.5	13.8 mm	14.5 mm	3
Y38065	1.75"	5/8"-18UNF	1/2"	14.5 mm	1
Y38066	1.75"	M16*1.5	5/8"	14.5 mm	1
Y38067	1.75"	5/8"-18UNF	5/8"	14.5 mm	1
Y38068	1.75"	5/8"-18UNF	13.8 mm	14.5 mm	1
Y38069	1.75"	1/2"-20UNF	1/2"	14.5 mm	1
Y38070	2.31"	1/2"-20UNF	1/2"	14.5 mm	1

Oil Seals

Item No.	National No.	Item No.	National No.	Item No.	National No.
OS27403937001	370155 A	OS40005375031	370015 A	OS47656250062	370173 A
OS27523937002	370127 A	OS40005626029	370066 A	OS47656251063	370005 A
OS28753875112	350150 A	OS40005757033	370349 A	OS47656311059	370003 A
OS28753875004	370150 A	OS40005757032	370036 A	OS47656999061	370006 A
OS28754125006	370010 A	OS41255375034	370094 A	OS48126311064	370027 A
OS28754175003	370054 A	OS41665500035	370106 A	OS48126500065	370004 A
OS28754250005	370093 A	OS42506008037	370065 A	OS48756001068	370195 A
OS31254174008	370145 A	OS42506035038	370107 A	OS48756373070	370007 A
OS31254500009	370014 A	OS42506048039	376590 A	OS48756437066	370057 A
OS31254625007	370046 A	OS42506250036	370031 A	OS48756500069	370121 A
OS31875000010	370029 A	OS42656064040	370030 A	OS48756622067	370109 A
OS32504500011	370018 A	OS43755757042	370338 A	OS50006250074	370063 A
OS33124501012	370191 A	OS43755757043	370037 A	OS50006250075	370028 A
OS33125000013	370013 A	OS43755905041	370048 A	OS50006622073	370166 A
OS34374755014	370047 A	OS43755905045	370182 A	OS50007000071	370154 A
OS35004450016	370179 A	OS43756251046	370019 A	OS50007437072	370038 A
OS35004543017	370132 A	OS43756311044	370034 A	OS52507375076	370069 A
OS35004626019	370189 A	OS45005374048	370124 A	OS55007125078	370043 A
OS35004751020	370169 A	OS45005500055	370178 A	OS55007250079	370120 A
OS35004842018	370001 A	OS45005750052	370022 A	OS55007437077	370039 A
OS35005000015	370002 A	OS45005876050	370131 A	OS56257186080	370064 A
OS36254810021	370012 A	OS45006000054	370020 A	OS56407501081	370119 A
OS36255000022	370011 A	OS45006251053	370021 A	OS60007875082	370077 A
OS38755126026	370033 A	OS45006310051	370086 A	OS63127682083	376856 A
OS38755376024	370165 A	OS45006441047	370192 A	OS66258007084	370149 A
OS38755501025	370024 A	OS45006622049	370078 A	OS72508750085	370175 A
OS38755690023	370023 A	OS46255999056	370025 A	OS73759054086	370082 A
OS39375372027	370008 A	OS45256622057	370051 A	OS787510234087	370151 A
OS39375501208	370009 A	OS46356007058	370026 A		
OS40005248030	370087 A	OS47655999060	370181 A		



Note: Same Design as CR


Landing Gears

Standard Models	Types of Shoes	Lift(D)		Height(A)	
		mm	inch	mm	inch
LG280001A	A	430	16.93"	814	32.05"
LG280001G	G	430	16.93"	770	30.31"
LG280001R	R	430	16.93"	797	31.38"
LG280001S	S	430	16.93"	822	32.36"
LG280001T	T	430	16.93"	794	31.26"

Standard Models	Types of Shoes	Lift(D)		Height(A)	
		mm	inch	mm	inch
LG280002A	A	480	18.90"	864	34.02"
LG280002G	G	480	18.90"	820	32.28"
LG280002R	R	480	18.90"	847	33.35"
LG280002S	S	480	18.90"	872	34.33"
LG280002T	T	480	18.90"	844	33.23"

Standard Models	Types of Shoes	Lift(D)		Height(A)	
		mm	inch	mm	inch
LG220001A	A	430	16.93"	782	30.79"
LG220001LG	LG	430	16.93"	738	29.06"
LG220001R	R	430	16.93"	765	30.12"
LG220001S	S	430	16.93"	790	31.10"
LG220001T	T	430	16.93"	762	30"

Standard Models	Types of Shoes	Lift(D)		Height(A)	
		mm	inch	mm	inch
LG220002A	A	480	18.90"	832	32.76"
LG220002LG	LG	480	18.90"	788	31.02"
LG220002R	R	480	18.90"	815	32.09"
LG220002S	S	480	18.90"	840	33.07"
LG220002T	T	480	18.90"	812	31.97"

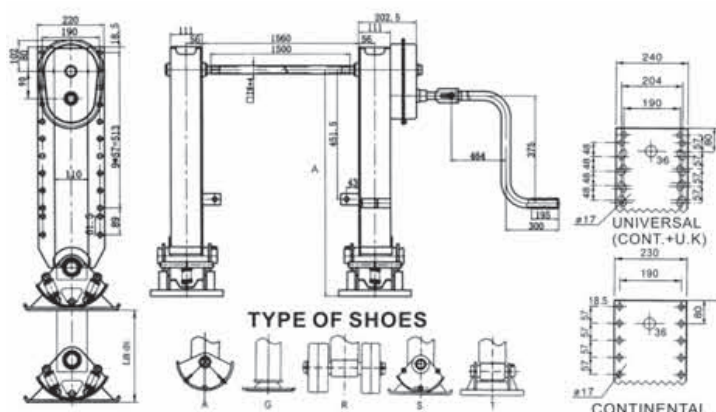

60,000 SERIES MAINTENANCE FREE SEMI-TRAILER LANDING GEAR

STANDARD SPECIFICATION

Capacity	: 28,000kg/pair
Static load	: 80,000kg/pair
Weight	: 98kg
Low gear	: 0.71mm Per Turn (mm/r) of Handle
High gear	: 5.4 mm Per Turn (mm/r) of Handle
One side operation crank force	: 28T-35kg
Two side operation crank force	: 28T-17kg

Features :

- 1) Wider square sections of 130MM
- 2) Full flange reinforcement
- 3) Standard mounting plate
- 4) 480MM or 430MM lift
- 5) Bigger sand shoes
- 6) Gearbox with low temperature premium chassis lube rated for service from - 30°C to 120°C
- 7) Maintenance free feature with grease packed jack screw
- 8) Lower crank force
- 9) Meets TTMA, AAR and German safety regulations for commercial vehicles



H22,000 SERIES HIGH SPEED LITE WEIGHT MAINTENANCE FREE SEMI-TRAILER LANDING GEAR

STANDARD SPECIFICATION

Capacity	: 24,000kg/pair
Static load	: 50,000 kg/pair
Weight	: 94kg
Low gear	: 1mm Per Turn (mm/r) of Handle
High gear	: 24.6 mm Per Turn (mm/r) of Handle
One side operation crank force	: 24T-32kg
Two side operation crank force	: 28T-16kg

Features :

- 1) 100% dust proof + greaseless
- 2) High speed operation
- 3) Full flange mounting plate of continental or universal version
- 4) 480MM or 430MM lift
- 5) Bigger sand shoes
- 6) Gearbox with low temperature premium chassis lube rated for service from - 30°C to 120°C
- 7) Maintenance free feature with grease packed jack screw
- 8) Meets TTMA, AAR and German safety regulations for commercial vehicles



Adustable Jaw Fifth Wheel

FEATURES

- RATED TO 174KN, 195KN+260KN
- UNIVERSAL INTERCHANGEABLE WEARABLE COLLAR+LOCKING ASSEMBLY
- COMPLIED WITH AUSTRALIAN STANDARD AS1773-1996
- DYNAMICALLY TESTED AND APPROVED TO AUSTRALIAN DESIGN RULES ADR 62/01
- FULLY PRESSED+FABRICATED WITH HIGH QUALITY STEEL PRODUCTS
- SUITABLE FOR SINGLE TRAILER, B DOUBLE AND TRIPLE ROADTRAINS APPLICATION

MODEL : FW78A-HIGHWAY MASTER



50MM SUPER HEAVY-DUTY GREASELESS FIFTH WHEEL
VERTICAL LOAD 20,000KG
D-VALUE 174KN
REPLACEABLE WEAR INSERTS

MODEL : FW79A-ROADMASTER



90MM SUPER HEAVY-DUTY GREASELESS FIFTH WHEEL
VERTICAL LOAD 28,000KG
D-VALUE 195KN
REPLACEABLE WEAR INSERTS

MODEL : FW78B-HIGHWAY MASTER



50MM SUPER HEAVY-DUTY GREASEABLE FIFTH WHEEL
VERTICAL LOAD 25,000KG
D-VALUE 174KN
REPLACEABLE STEEL WEAR INSERTS

MODEL : FW79B-ROADMASTER




90MM SUPER HEAVY-DUTY GREASEABLE FIFTH WHEEL
VERTICAL LOAD 28,000KG
D-VALUE 195KN
REPLACEABLE STEEL WEAR INSERTS

Flare Kits



Item No.: FK-502
Standard : SAE.DOT
Packing : 144 or 162 sets / wooden crate
3060 sets (i.e. 20 wooden crates)/20' container

Suspensions



Fs Of Air Suspension	H	Axle Load
FS11/305	305	11
FS11/280	280	11
FS11/254	254	11
FS11/229	229	11
FS11/203	203	11



永達貨運公司

Since 1973

WING TAT CARGOES SERVICE COMPANY

**Address: 286A, TUNG CHAU STREET, G/F.,
SHAM SHUI PO, KOWLOON, HONG KONG**

Tel: (852) 64858663 / (852) 61498148

Fax: (852) 27257968

E-mail: wtcargoesservice@gmail.com

Website: www.wtcargoesservice.weebly.com