



PAAAP

HIOKI

TACHO HiTESTER FT3405, FT3406

Environmental Measuring Instruments



Rugged Design and Optimal Functionality **CE**

Safety

✓ Long non-contact distance

The FT3405 and FT3406 has a detection distance 2.5 times greater than its HIOKI predecessor, extending the distance from moving parts for added safety.

HIOKI 3403/ 3404	200 mm/ 7.8"
HIOKI FT3405/ FT3406	500mm/ 19.7"

✓ Red LED


The red LED lets you continuously focus on the measurement spot even when testing from afar.



Reliability

✓ DROP PROOF

Testers are built tough to withstand a 1-meter drop onto a concrete floor.



✓ Dust-proof construction

IP50 dust-proof structure makes the Tacho HiTesters tough against the dirt and dust that are unavoidable in field environments.



Convenience

✓ Contact Testing Also Available

By using the optional Z5003 contact adapter, the FT3405 and FT3406 become contact-type tachometers.



✓ Signal Output

FT3406 only

With the built-in analog output and pulse output functions, you can record the variations in rotation by connecting the Tacho HiTester to a recorder or data logger. Use an AC adapter with the FT3406 for long-term measurements.



ISO 9001
JMI-0216



ISO 14001
JQA-E-90091



www.hioki.com

HIOKI company overview, new products, environmental considerations and other information are available on our website.




Guaranteed for 3 years



Waveform recording

Measure signal variations with a waveform recorder or data logger by using the FT3406's analog output or pulse output functions. Use a multi-channel logger in combination with input from other types of sensors, or a multi-channel recorder to simultaneously measure voltage and current.

Analog output



Pulse output

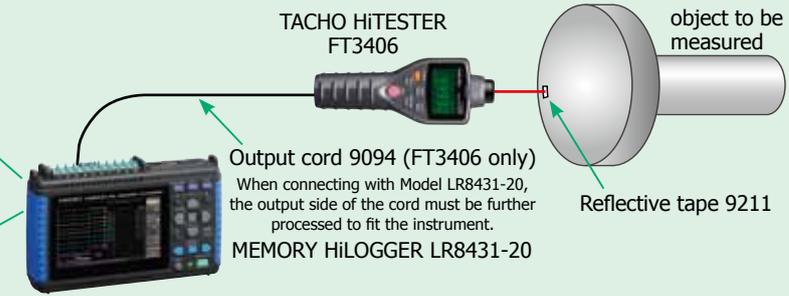

Specifications

Guaranteed accuracy period: 1year

Measurement method	Using red visible-spectrum light and reflective tape or a reflective plate (Contact adapter Z5003)
Display	Transmissive FSTN LCD
Range switching	Automatic
Detection range	50mm to 500mm (1.97" to 19.7")
Reflection detection indicator	Flashing red LED built into [HOLD] key, buzzer
Sampling period	62.5 ms to 2 s (depending on usage conditions)
Display refresh rate	Approx. 0.5 to 10 times/sec
Drop proof	1m onto concrete surface
Dustproof and waterproof	IP50 (EN60529)
Functions	MAX/MIN display, Display hold, Average, Auto power save, Buzzer, Backlight function
Operating temperature	0 to 50°C (32 °F to 122 °F)
Operating humidity	Up to 40°C (104 °F) 80%RH or less 40°C to 45°C (104 °F to 113 °F) 60%RH or less 45°C to 50°C (113 °F to 122 °F) 50%RH or less (non-condensing)
Storage temperature and humidity	-10°C to 50°C (14 °F to 122 °F), 80%RH or less (non-condensing)
Applicable standards	EMC : EN61326, EN61000-3-2, EN61000-3-3 Safety : EN61010
Power supply	LR6 alkaline battery×2 AC adapter Z1004 (FT3406 only)
Maximum rated power	0.5VA
Continuous operating time	Approx. 30 hours (FT3405) or approx. 25 hours (FT3406); When using alkaline batteries with buzzer off
Dimensions	Approx. 71W×186H×38D mm (2.80"W×7.32"H×1.5"D)
Mass	Approx. 230g (8.1oz.) (with batteries)

FT3406 only

Analog output	Output level: 0-1Vf.s., Output resistance: 1kΩ, Accuracy: ±2%f.s., Accuracy guarantee temperature and humidity range: 23°C±5°C, 80%RH or less, Temperature coefficient: Add [accuracy specifications × 0.1 × (T-23)], where T is the operating temperature [°C]. No temperature coefficient for 18°C to 28°C range.
Pulse output	Output level: 0-3.3V±0.3V, Output resistance: 1kΩ
Functions	Power input terminal, AC adapter detection, output terminal setting

Specifications

Note 1: The lowermost digit is fixed at 0 at speeds of 20,000r/min and greater.

Note 2: The lowermost digit is fixed at 0 when the averaging setting is off.

[Tacho Testing]

MODE	Non-contact		Contact	
	AVG=ON	AVG=OFF	AVG=ON	AVG=OFF
r/min	30.00 to 199.99		15.00 to 199.99	
	200.0 to 1999.9	300.0 to 1999.0	200.0 to 1999.9	150.0 to 1999.0
	2000 to 19999	2000 to 19990	2000 to 19999	2000 to 19990
r/s	20000 to 99990	20000 to 99990		
	0.5000 to 1.9999		0.2500 to 1.9999	
	2.000 to 19.999	5.000 to 19.990	2.000 to 19.999	2.500 to 19.990
Cycle (ms)	20.00 to 199.99	20.00 to 199.90	20.00 to 199.99	20.00 to 199.90
	200.0 to 1600.0	200.0 to 1600.0	200.0 to 333.0	200.0 to 333.0
	0.6000 to 1.9999	0.6000 to 1.9990		

[Count Testing]

count	0 to 999999
	(Input conditions: Up to rotational speed measurement upper limit)

[Cycle Speed]

MODE	Contact	
	AVG=ON	AVG=OFF
Cycle (m/min)	1.500 to 19.999	
	20.00 to 199.99	15.00 to 199.90
Cycle (ms)	200.0 to 1999.9	200.0 to 1999.0
	0.0250 to 1.9999	0.2500 to 1.9990
	2.000 to 19.999	2.000 to 19.990
	20.00 to 33.30	20.00 to 33.30

Accuracy:

	AVG=ON	AVG=OFF
Up to 9999 counts	±1dgt.	±10dgt.
10000 counts or more	±2dgt.	±20dgt.
20000 counts or more (r/min mode only)	±20dgt.	±100dgt.
Period measurement only	±0.5%rdg. is added to above-mentioned accuracy.	

Bundled Accessories

Reflective tape 9211 (1 sheet), Carrying case
Output cord 9094 (FT3406 only, Not CE marked)
Instruction manual, LR6 alkaline battery × 2



Option

Contact adapter Z5003 (includes 9032, two 9033 and 9212)			
	Metal contact tip 9032		Rubber contact tip 9033
	Peripheral ring 9212		
	Reflective tape 9211 (10 sheets) (30 pieces per sheet, each piece 12 × 12 mm)	FT3406 only	
			AC adapter Z1004

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

HIOKI

HIOKI E. E. CORPORATION

HEADQUARTERS:

81 Koizumi, Ueda, Nagano, 386-1192, Japan
TEL +81-268-28-0562 FAX +81-268-28-0568
http://www.hioki.com / E-mail: os-com@hioki.co.jp

HIOKI USA CORPORATION:

TEL +1-609-409-9109 FAX +1-609-409-9108
http://www.hiokiusa.com / E-mail: hioki@hiokiusa.com

HIOKI (Shanghai) SALES & TRADING CO., LTD.:

TEL +86-21-63910090 FAX +86-21-63910360
http://www.hioki.cn / E-mail: info@hioki.com.cn

HIOKI INDIA PRIVATE LIMITED:

TEL +91-124-6590210 FAX +91-124-6460113
E-mail: hioki@hioki.in

HIOKI SINGAPORE PTE. LTD.:

TEL +65-6634-7677 FAX +65-6634-7477
E-mail: info@hioki.com.sg

HIOKI KOREA CO., LTD.:

TEL +82-42-936-1281 FAX +82-42-936-1284
E-mail: info-kr@hioki.co.jp

РАДАР - ОФИЦИАЛЬНЫЙ ДИЛЕР HIOKI



РАДАР

РОССИЯ, 198152, Санкт-Петербург
Краснопутиловская ул., д.25
Тел./факс +7 (812) 600-48-89
Тел.: +7 (812) 375-32-44

www.radar1.ru

info@radar1.ru

FT3405E4-3XB Printed in Japan

All information correct as of Oct. 1, 2013. All specifications are subject to change without notice.